

## 98Y2177-AO

8-Pack of IBM® 98Y2177 Compatible TAA 16GBase-SW Fibre Channel SFP+ Transceiver (MMF, 850nm, 300m, LC)

### Features

- SFF-8432 and SFF-8472 Compliance
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Multi-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications

- Fibre Channel
- Access and Enterprise

### Product Description

This 8-pack of of IBM® 98Y2177 compatible SFP+ transceivers provides 16GBase-SW Fibre Channel throughput up to 300m over multi-mode fiber (MMF) using a wavelength of 850nm via an LC connector. Each is guaranteed to be 100% compatible with the equivalent IBM® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. It is built to meet or exceed the specifications of IBM®, as well as to comply with MSA (Multi-Source Agreement) standards to ensure seamless network integration. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



## Absolute Maximum Ratings

| Parameter                  | Symbol           | Min. | Max. | Unit |
|----------------------------|------------------|------|------|------|
| Maximum Supply Voltage     | V <sub>cc</sub>  | -0.5 | 4.0  | V    |
| Storage Temperature        | T <sub>S</sub>   | -40  | 85   | °C   |
| Operating Case Temperature | T <sub>c</sub>   | -5   | 70   | °C   |
| Operating Humidity         | RH               | 5    | 95   | %    |
| 50/125µm G.652 MMF (OM3)   | L <sub>max</sub> |      | 300  | m    |

## Electrical Characteristics

| Parameter                      | Symbol               | Min.                 | Typ. | Max.                 | Unit | Notes |
|--------------------------------|----------------------|----------------------|------|----------------------|------|-------|
| Power Supply Voltage           | V <sub>cc</sub>      | 3.13                 | 3.30 | 3.47                 | V    |       |
| Power Supply Current           | I <sub>cc</sub>      |                      |      | 300                  | mA   |       |
| Transmitter                    |                      |                      |      |                      |      |       |
| Differential data input swing  | V <sub>in,pp</sub>   | 120                  | 600  | 850                  | mV   |       |
| Input differential impedance   | Z <sub>in</sub>      | 90                   | 100  | 110                  | Ω    |       |
| TX Disable-High                |                      | 2.0                  |      | V <sub>cc</sub> +0.3 | V    |       |
| TX Disable-Low                 |                      | V <sub>ee</sub> -0.3 |      | 0.8                  | V    |       |
| TX Fault-High                  |                      | 2.0                  |      | V <sub>cc</sub> +0.3 | V    |       |
| TX Fault-Low                   |                      | V <sub>ee</sub> -0.3 |      | 0.8                  | V    |       |
| Receiver                       |                      |                      |      |                      |      |       |
| Differential data output swing | V <sub>out, pp</sub> | 300                  | 600  | 850                  | mV   |       |
| Output differential impedance  | Z <sub>in</sub>      | 90                   | 100  | 110                  | Ω    |       |
| LOS-High                       |                      | 2.0                  |      | V <sub>cc</sub> +0.3 | V    |       |
| LOS-Low                        |                      | V <sub>ee</sub> -0.3 |      | 0.8                  | V    |       |

## Optical Characteristics

| Parameter                          | Symbol           | Min.                            | Typ. | Max.  | Unit  | Notes |
|------------------------------------|------------------|---------------------------------|------|-------|-------|-------|
| Transmitter                        |                  |                                 |      |       |       |       |
| Output Optical Power (average)     | P <sub>AVE</sub> | -7.3                            |      | -1    | dBm   |       |
| Optical Modulation Amplitude       | P(OMA)           | -4.3                            | -2   |       | dBm   |       |
| Extinction Ratio                   | ER               | 3                               |      |       | dB    |       |
| Transmitter and Dispersion Penalty | TDP              |                                 |      | 3.9   | dB    |       |
| Average Launch power OFF TX        | P <sub>off</sub> |                                 |      | -30   | dBm   |       |
| Optical Wavelength                 | λλ               | 840                             | 855  | 860   | nm    |       |
| Optical Return Loss Tolerance      | ORLT             |                                 |      | 12    | dB    |       |
| Relative Intensity Noise           | RIN              |                                 |      | -128  | dB/Hz |       |
| Eye Diagram                        |                  | Compatible with IEEE 802.3-2005 |      |       |       |       |
| Receiver                           |                  |                                 |      |       |       |       |
| Receiver Sensitivity               | PIN              |                                 |      | -9.9  | dBm   |       |
| Receiver Sensitivity @ FEC rate    | PIN-OMA          |                                 |      | -11.1 | dBm   |       |
| Receiver Overload                  | P <sub>max</sub> | -1                              |      |       | dBm   |       |
| Optical Center Wavelength          | λ <sub>C</sub>   | 840                             |      | 860   | nm    |       |
| LOS De-Assert                      | LOSD             |                                 |      | -13   | dBm   |       |
| LOS Assert                         | LOSA             | -30                             |      |       | dBm   |       |
| LOS Hysteresis                     |                  | 0.5                             |      |       | dB    |       |

## Pin Descriptions

| Pin | Symbol     | Name/Descriptions                                                              | Ref. |
|-----|------------|--------------------------------------------------------------------------------|------|
| 1   | VeeT       | Transmitter Ground (Common with Receiver Ground).                              | 1    |
| 2   | TX Fault   | Transmitter Fault. LVTTTL-O                                                    | 2    |
| 3   | TX Disable | Transmitter Disable. Laser output disabled on high or open. LVTTTL-I.          | 3    |
| 4   | SDA        | 2-Wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i). LVTTTL-I/O. |      |
| 5   | SCL        | 2-Wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i). LVTTTL-I.   |      |
| 6   | MOD_ABS    | Module Absent, Connect to VeeT or VeeR in Module.                              | 4    |
| 7   | RS0        | Rate Select 0. Not used                                                        | 5    |
| 8   | LOS        | Loss of Signal indication. Logic 0 indicates normal operation. LVTTTL-O.       | 2    |
| 9   | RS1        | Rate Select 1. Not used                                                        | 5    |
| 10  | VeeR       | Receiver Ground (Common with Transmitter Ground).                              | 1    |
| 11  | VeeR       | Receiver Ground (Common with Transmitter Ground).                              | 1    |
| 12  | RD-        | Receiver Inverted DATA out. AC Coupled. CML-O.                                 |      |
| 13  | RD+        | Receiver Non-inverted DATA out. AC Coupled. CML-O.                             |      |
| 14  | VeeR       | Receiver Ground (Common with Transmitter Ground).                              | 1    |
| 15  | VccR       | Receiver Power Supply.                                                         |      |
| 16  | VccT       | Transmitter Power Supply.                                                      |      |
| 17  | VeeT       | Transmitter Ground (Common with Receiver Ground).                              | 1    |
| 18  | TD+        | Transmitter Non-Inverted DATA in. AC Coupled. CML-I.                           |      |
| 19  | TD-        | Transmitter Inverted DATA in. AC Coupled. CML-O.                               |      |
| 20  | VeeT       | Transmitter Ground (Common with Receiver Ground).                              | 1    |


## Notes:

1. The module signal ground contacts, VeeR and VeeT, should be isolated from the module case.
2. This contact is an open collector/drain output and should be pulled up to the Vcc\_Host with resistor in the range 4.7KΩ to 10KΩ. Pull ups can be connected to one or several power supplies, however the host board design shall ensure that no module contract has voltage exceeding module VccT/R +0.5.V.
3. Tx\_Disable is an input contact with a 4.7KΩ to 10KΩ pull-up resistor to VccT inside module.
4. Mod\_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull the contract up to Vcc\_Host with a resistor in the range from 4.7KΩ to 10KΩ. Mod\_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.
5. Internally pulled down per SFF-8431




**Mechanical Specifications**

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

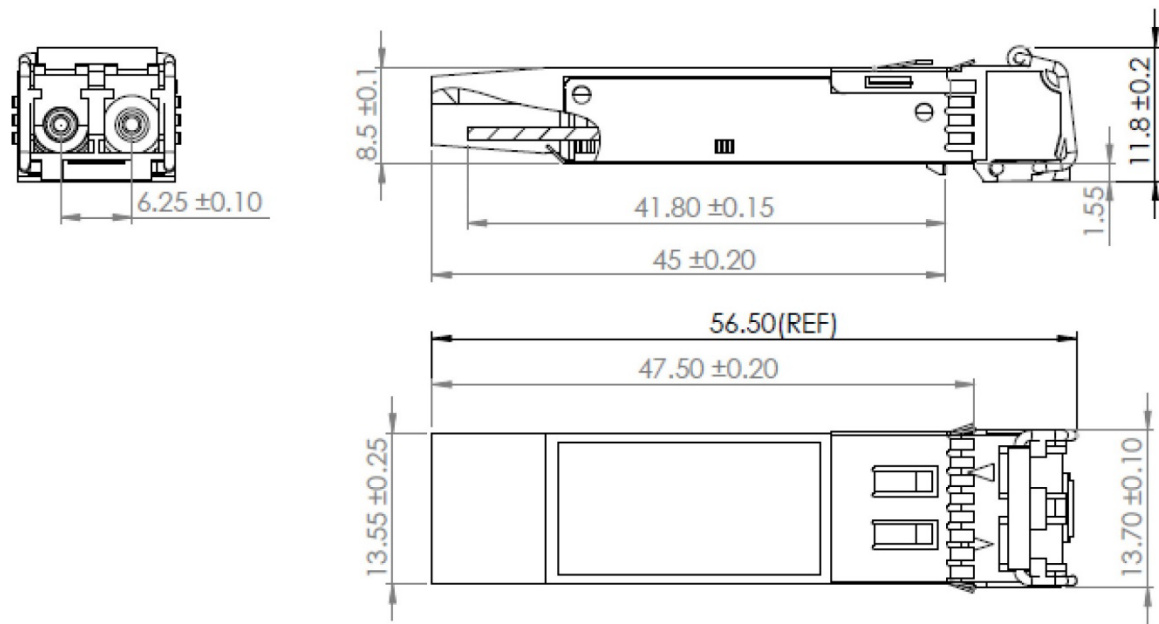

**EEPROM Information**

EEPROM memory map specific data field description is as below:

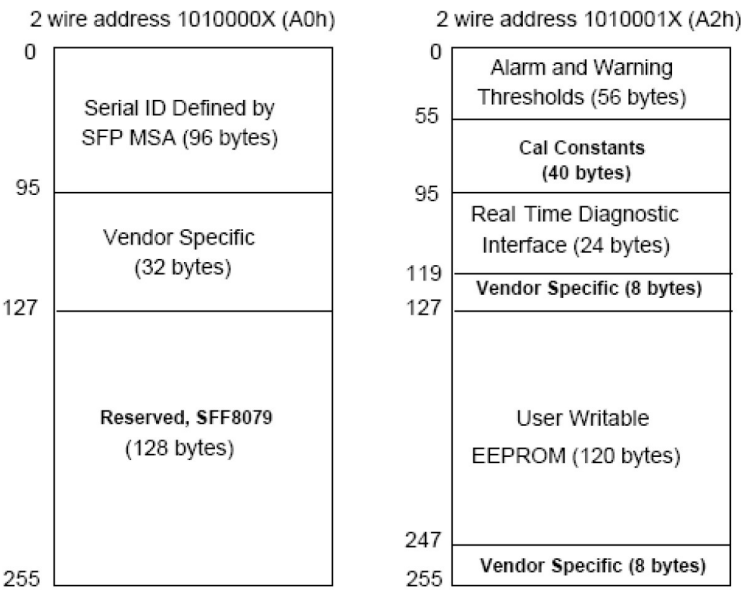

## About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is ingrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



## U.S. Headquarters

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

## Europe Headquarters

Email: [salesupportemea@addonnetworks.com](mailto:salesupportemea@addonnetworks.com)

Telephone: +44 1285 842070