

4XEM's 100W Wall Charger Dual USB-C

4XEM Part- 4XGAN010100WW



4XEM's 100W USB-C offers amazing charging power and speed with two USB ports capable of charging a variety of devices simultaneously. USB-A has long been a standard port allowing for charging or power to legacy and current devices; however, USB-C is rapidly becoming a new standard for charging devices, allowing for up to 100W charging for power at faster speeds. This device features 2x USB-C ports. Keep your USB devices charged on the go or at home reliably with 4XEM's USB-C Wall Charger.

Problem it solves: Charge one to two USB devices with reliable power and speed using 4XEM's 100W GaN Charger.

4XEM Products Are Available At Your Favorite Online Retailers


WWW.4XEM.COM

Contact Todd Schaus 4XEM sales Rep
1-866-999-4936 Ext.104 tschaus@4xem.com



Features:

- 100-Watt power budget
- 2x USB-C port
- Wall mounted charger
- Compatible with any USB charged device
- Compact travel size
- Rounded edges
- Fast Charging

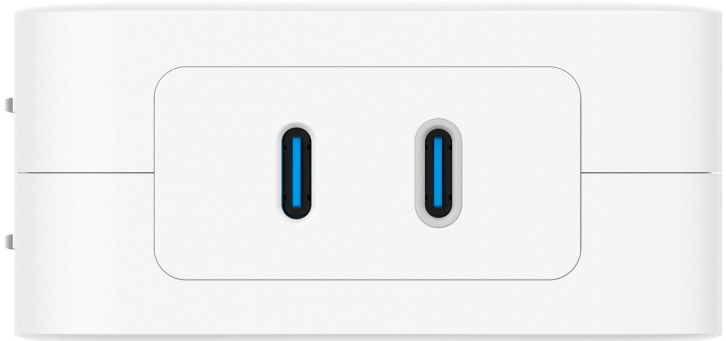

Applications:

- Home
- Office
- Travel
- Meetings
- Classrooms
- Quick Charging



4XEM Products Are Available At Your Favorite Online Retailers





DATA SHEET

| | | |
|--------------------------|---|--|
| Warranty Information | Warranty | 1 Year |
| Connector(s) | Charging Port(s) Power Source | 2x USB Type-C Female Non-Polarized NEMA 1-15P (Standard NA Wall Outlet) Fixed with Retractable Prongs |
| Performance | Industry Standards Certifications | USB-PD 3.0 CE FCC |
| Physical Characteristics | Colour Display LED Indicator(s) Power Cable Length Product Height Product Width Product Length Weight of Product | Black Yes Power: Blue N/A 2.62 in [66.5 mm] 1.27 in [32.3 mm] 2.69 in [68.3 mm] 3.32 in [84.4 mm] (with power prongs out) 7.76 oz [220 g] |
| Power | Total Power Budget Power Delivery Input Voltage Output Voltage (C1/C2) Output Voltage (C1) + (C2) | 100W 100W Max 100-240VAC, 50Hz-60Hz @ 2A 100W: 5/9/12/15V 3A, 20V 5A 95W MAX - 65W: 5/9/12/15V 3A, 20V 3.25A + 30W: 5/9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A |
| Environmental | Operating Temperature Storage Temperature Humidity | 32°F to 104°F [0°C to 40°C] -4°F to 176°F [-20°C to 80°C] 5% to 90% (non-condensing) |
| Packaging Information | Package Type Package Height Package Width Package Length Shipping (Package) Weight | Poly-Bag 6.00 in [152.4 mm] 4.00 in [101.6 mm] 1.28 in [32.5 mm] 7.83 oz [222 g] |
| What's in the Box | Included in Package | 1x 100W Dual USB-C GaN Charger |
| Notes | Notes | |

* Product appearance and specifications are subject to change without notice.
* Same day shipping is only available for orders shipping within the United States.

4XEM Products Are Available At Your Favorite Online Retailers

WWW.4XEM.COM

**Contact Todd Schaus 4XEM sales Rep
1-866-999-4936 Ext.104 tschaus@4xem.com**

