




TrueReach
HDMI™ EXTENDER
HDMI Extender over single Cat 5/6



User Manual
Y10G002-B1

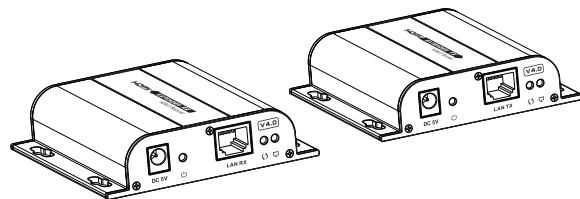

Introduction

The Rocstor TrueReach HDMI extender, extends the transmit length of HDMI Visual/Audio up to 120m(394ft) with single network cable. Supports IR signal transmission, to control media playback of the signal source device at the display location.


Important Safety instructions:

1. Do not mix up the HDMI EXTENDER sender and HDMI EXTENDER receiver, and the IR blaster and IR receiver.
2. Do not plug-in/out the cables ,when it is in use.
3. Use DC 5V power supply only.

Package Contents




HDMI EXTENDER
sender TX ×1pc



DC5V/1A ×2pcs




HDMI EXTENDER
receiver Rx ×1pc



IR blaster extension
cable x1pc



User Manual ×1pc



IR receiver extension
cable x1pc

Note: above accessory content is regular package for a kit. If purchased HDMI extender TX or HDMI extender RX separately, the package contents would be different.


Installation Requirements

1. HDMI source device (computer graphics card, DVD,PS3, HD monitoring equipment etc).

2. HDMI display device like SDTV, HDTV, projector with HDMI port.
3. Network cables: UTP/STP Cat5e/6 network cables, which following the standard of IEEE-568B.
Transmission length: CAT5 260ft (80m)/CAT5E 328ft (100m)/CAT6 393ft (120m).


Panel Description

1. HDMI EXTENDER TX (Sender)



- | | |
|--|---------------------------|
| ① Reset | ⑤ Power Light |
| ② HDMI signal input | ⑥ RJ45 signal output |
| ③ IR signal output to connect with blaster extension cable | ⑦ Data transmission light |
| ④ Power input (DC5V) | ⑧ Network link light |

2. HDMI EXTENDER RX(Receiver)



- | | |
|---|---------------------------|
| ① Reset | ⑤ Power Light |
| ② HDMI signal output | ⑥ RJ45 signal input |
| ③ IR signal input to connect with IR receiver extension cable | ⑦ Data transmission light |
| ④ Power input (DC5V) | ⑧ Network link light |

