# IN SEARCH OF INCREDIBLE

Service Manual



#### COPYRIGHT INFORMATION

No part of this manual, including the products and software described in it, may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means, except documentation kept by the purchaser for backup purposes, without the express written permission of ASUSTEK COMPUTER INC. ("ASUS").

ASUS PROVIDES THIS MANUAL "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL ASUS, ITS DIRECTORS, OFFICERS, EMPLOYEES OR AGENTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING DAMAGES FOR LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF USE OR DATA, INTERRUPTION OF BUSINESS AND THE LIKE), EVEN IF ASUS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES ARISING FROM ANY DEFECT OR FRROR IN THIS MANUAL OR PRODUCT.

Products and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are used only for identification or explanation and to the owners' benefit, without intent to infringe.

SPECIFICATIONS AND INFORMATION CONTAINED IN THIS MANUAL ARE FURNISHED FOR INFORMATIONAL USE ONLY, AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE, AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY ASUS. ASUS ASSUMES NO RESPONSIBILITY OR LIABILITY FOR ANY ERRORS OR INACCURACIES THAT MAY APPEAR IN THIS MANUAL, INCLUDING THE PRODUCTS AND SOFTWARE DESCRIBED IN IT.

Copyright © 2024 ASUSTeK COMPUTER INC. All Rights Reserved.

#### LIMITATION OF LIABILITY

Circumstances may arise where because of a default on ASUS' part or other liability, you are entitled to recover damages from ASUS. In each such instance, regardless of the basis on which you are entitled to claim damages from ASUS, ASUS is liable for no more than damages for bodily injury (including death) and damage to real property and tangible personal property; or any other actual and direct damages resulted from omission or failure of performing legal duties under this Warranty Statement, up to the listed contract price of each product.

ASUS will only be responsible for or indemnify you for loss, damages or claims based in contract, tort or infringement under this Warranty Statement.

This limit also applies to ASUS' suppliers and its reseller. It is the maximum for which ASUS, its suppliers, and your reseller are collectively responsible.

UNDER NO CIRCUMSTANCES IS ASUS LIABLE FOR ANY OF THE FOLLOWING: (1) THIRD-PARTY CLAIMS AGAINST YOU FOR DAMAGES; (2) LOSS OF, OR DAMAGETO, YOUR RECORDS OR DATA; OR (3) SPECIAL, INCIDENTAL, OR INDIRECT DAMAGES OR FOR ANY ECONOMIC CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS OR SAVINGS), EVEN IF ASUS, ITS SUPPLIERS OR YOUR RESELLER IS INFORMED OF THEIR POSSIBIL ITY.

#### SERVICE AND SUPPORT

Visit our multi-language website at https://www.asus.com/support/

#### **Table of Contents**

Cha	oter	1:1	Intro	duo	ction
Cila	PtCI			uu	LIOI

Disclaimer	8
Safety precautions	8
Pre-repair checklist	10
Installation tools	11
Accessories	11
Diagnostic tools	1
Major components	12
Chapter 2: Service Procedures	
Bottom cover	20
Removal	2 <sup>.</sup>
Installation	2
Battery	24
Removal	2
Installation	2
M.2 SSD module	3
Removal	3
Installation	34
WLAN module	3
Removal	3
Installation	3
LTE module (on selected models)	40
Removal	4
Installation	42

RAM module	43
Removal	44
Installation	45
Speakers	46
Removal	47
Installation	48
Heat sink	49
Removal	50
Installation	53
Fan module	55
Removal	56
Installation	57
Smart card reader (on selected models)	58
Removal	59
Installation	60
Display panel module	61
Removal	62
Installation	66
I/O board	70
Removal	71
Installation	72
Motherboard	73
Removal	74
Installation	76

Touchpad	79
Removal	80
Installation	82
Keyboard module	84
Removal	85
Installation	86
Appendix	
Wiring and connection diagrams	88

# Chapter 1: Introduction

#### **Disclaimer**

ASUS is not responsible for direct, indirect, intentional or unintentional damages resulting from improper installation and operation.

# Safety precautions

- Before handling components, use a grounded wrist strap or touch a safely grounded object to avoid damaging them due to static electricity.
- Keep liquids or moisture away from your device to avoid short circuits.
- Remove rings, watches, and any other metal objects from your hands.
- Hold components by the edges to avoid touching the ICs.
- Properly install all components before connecting the AC power.
- Do not use power adapters or batteries from other devices to reduce the risk of injury to persons due to fire or explosion.
   Use only certified power adapters or batteries supplied by the manufacturer or authorized retailers.
- Detach all clips or flaps before removing cables to prevent damage.

- Disconnect cables, connectors, and power plugs by pulling the plug evenly to avoid damage.
- Use the correct screw models on your device to prevent damage.
- Confirm that the cable orientation is correct before connecting any cables.
- Fully remove all adhesive residue after removing and before installing any components.
- Photograph the appearance of cables, cable routing, connectors, and screws for later reference before proceeding with each step.

# Pre-repair checklist

- Read the entire manual before starting any service procedures and follow all instructions.
- Back up the data on your device.
- Place your device on a clean and stable surface.
- · Turn off your device.
- Disconnect all connected peripherals and cables.
- Disconnect all power cables and remove the battery pack (if applicable).

#### IMPORTANT!

- If you are uncertain about performing the described service procedures, stop and contact an authorized service center for assistance.
- Purchase replacement components from authorized retailers of this device to ensure maximum compatibility and reliability.

#### NOTE:

- · The illustrations are for reference only.
- The service procedures described in this manual depend on the model configuration and may not reflect the entire servicing process.
   To service components that are not covered in this manual, please visit an authorized service center for further assistance.
- Keep all adhesive tape, insulating materials, screws, and other removable items in a safe place until the service procedure is completed, as they may be needed during installation.

#### **Installation tools**



#### **Accessories**



**Power adapter** 


# **Diagnostic tools**

Use ASUS System Diagnostics after completing any service procedures to ensure that all components are working properly.

For more information, visit www.asus.com/support/FAQ/1048490/.

# Major components

### **B3604CVA**

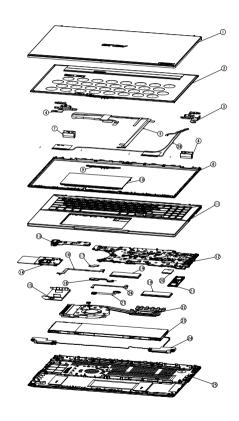


- 1. Top cover
- 2. Display panel
- 3. Display hinge (right)
- 4. Display hinge (left)
- 5. eDP cable
- 6. Hinge cap (right)
- 7. Hinge cap (left)
- 8. Display bezel
- 9. Camera module\*
- 10. Touchpad
- 11. Keyboard module
- 12. Motherboard
- 13. I/O board
- 14. Smart card reader\*

- 15. Fan duct
- 16. Smart card reader cable
- 17. I/O board cable
- 18. Coin battery
- 19. RAM module
- 20. WLAN module
- 21. M.2 SSD module
- 22. Heat sink and fan
- 23. Battery
- 24. Speakers
- 25. Bottom cover
- 26. Touchpad cable
- 27. Battery power cable
- 28. Antenna cable

<sup>\*</sup> On selected models

#### **B3604CVF**

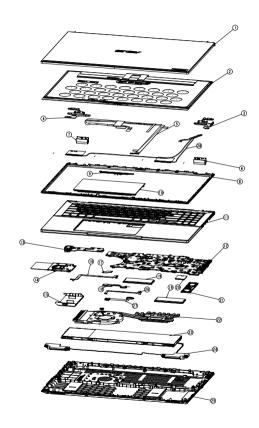


- 1. Top cover
- 2. Display panel
- 3. Display hinge (right)
- 4. Display hinge (left)
- 5. eDP cable
- 6. Hinge cap (right)
- 7. Hinge cap (left)
- 8. Display bezel
- 9. Camera module\*
- 10. Touchpad
- 11. Keyboard module
- 12. Motherboard
- 13. I/O board
- 14. Smart card reader\*

- 15. Fan duct
- 16. Smart card reader cable
- 17. I/O board cable
- 18. Coin battery
- 19. RAM module
- 20. WLAN module
- 21. M.2 SSD module
- 22. Heat sink and fan
- 23. Battery
- 24. Speakers
- 25. Bottom cover
- 26. Touchpad cable
- 27. Battery power cable
- 28. Antenna cable

<sup>\*</sup> On selected models

#### **B3604CMA**

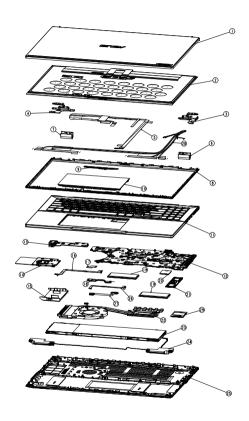


- 1. Top cover
- 2. Display panel
- 3. Display hinge (right)
- 4. Display hinge (left)
- 5. eDP cable
- 6. Hinge cap (right)
- 7. Hinge cap (left)
- 8. Display bezel
- 9. Camera module\*
- 10. Touchpad
- 11. Keyboard module
- 12. Motherboard
- 13. I/O board
- 14. Smart card reader\*
- 15. Fan duct
- \* On selected models

- 16. Smart card reader cable
- 17. I/O board cable
- 18. Coin battery
- 19. RAM module
- 20. WLAN module
- 21. M.2 SSD module
- 22. Heat sink and fan
- 23. Battery
- 24. Speakers
- 25. Bottom cover
- 26. Touchpad cable
- 27. Battery power cable
- 28. Antenna cable
- 29. LTE module\*

# Chapter 2: Service Procedures

#### **Bottom cover**



#### Before you begin


Read the Safety Precautions and complete the Pre-repair Checklist.

#### **Screw list**

● M2.0 X 6.0L (11pcs)

#### Removal


1. Remove the screw(s) from the bottom cover.



2. Use the plastic blade to pry open the indicated area of the bottom cover as shown in the illustration below.


**IMPORTANT!** Avoid sliding the plastic blade along the side of your device or air vents to prevent damage.

3. Remove the bottom cover.




#### Installation

- 1. Install the bottom cover.
- 2. Gently press down on the bottom cover until it clicks into place.
- 3. Secure the bottom cover using the screw(s) you removed earlier.



# **Battery**



# Before you begin

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover

#### **Screw list**


● ● M2.0 X 4.0L (4pcs)

#### Removal


1. Disconnect the battery power cable.

#### IMPORTANT!

- Disconnect the battery power cable by lifting the side with the red wires first.
- Serious risk of fire or explosion may occur if the battery is punctured.
   If you are uncertain about proceeding, stop and contact an authorized service center for assistance.




2. Remove the screw(s) from the battery, then remove the battery.



3. Remove the tape, then remove the battery power cable.




4. Remove the battery brackets from the battery.



#### Installation

1. Attach the battery brackets to the battery.



2. Connect the battery power cable to the battery, then reattach the tape.




3. Attach the polyester film to the battery.


**NOTE:** This step is only required when you are replacing the existing component with a new one.




 Install the battery, then secure the battery using the screw(s) you removed earlier.



- 5. Reconnect the battery power cable.
- 6. Install the components you removed in the *Before you begin* section.



### M.2 SSD module



### Before you begin

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery


#### **Screw list**

- M2.0 X 4.0L (2pcs)
- M2.0 X 3.0L (2pcs)


#### Removal

#### M.2 2280 SSD module

1. Remove the screw(s), then remove the M.2 SSD shield.




2. Remove the M.2 SSD module from the motherboard.



#### M.2 2230 SSD module (on selected models)


- Remove the screw, then remove the M.2 SSD module from the motherboard.
- 2. Flip the M.2 SSD module over, then remove the screw and remove the M.2 SSD module from the M.2 SSD bracket.
- 3. Install the M.2 SSD bracket, then secure the M.2 SSD bracket using the screw you removed earlier.




#### Installation

#### M.2 2280 SSD module

 Align and insert the M.2 SSD module into the M.2 connector on the motherboard.




- 2. Install the M.2 SSD shield, then secure the M.2 SSD shield using the screw(s) you removed earlier.
- 3. Install the components you removed in the *Before you begin* section.




#### M.2 2230 SSD module (on selected models)

- Remove the screw, then remove the M.2 SSD bracket from the motherboard.
- 2. Flip the M.2 SSD bracket over, then secure the M.2 SSD module to the M.2 SSD bracket using the screw you removed earlier.
- Align and insert the M.2 SSD module into the M.2 connector on the motherboard, then secure the M.2 SSD module using the screw you removed earlier.
- 4. Install the components you removed in the *Before you begin* section.



## **WLAN** module




# **Before you begin**

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery

#### **Screw list**

• M2.0 X 3.0L (1pc)


- Remove the screw and remove the bracket, then disconnect the cable(s) and remove the WLAN module.
- 2. Remove the tape, then remove the cable(s) from the cable guide(s).




- Install the WLAN module and reconnect the cable(s), then install
  the bracket and secure the bracket using the screw you removed
  earlier.
- 2. Route the cable(s) through the cable guide(s), then reattach the tape.

**IMPORTANT!** Damage may occur if cables are not properly routed through the cable guides. Confirm that all cables are routed through each of the indicated cable guides before proceeding.

 Install the components you removed in the Before you begin section.



# LTE module (on selected models)




## Before you begin

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery

#### **Screw list**

● M2.0 X 3.0L (1pc)


- Remove the polyester film and disconnect the cable(s), then remove the screw and remove the LTE module.
- 2. Remove the cable from the cable guide.




- Install the LTE module and secure the LTE module using the screw you removed earlier, then reconnect the cable(s) and reattach the polyester film.
- 2. Route the cable through the cable guide(s).

**IMPORTANT!** Damage may occur if cables are not properly routed through the cable guides. Confirm that all cables are routed through each of the indicated cable guides before proceeding.

 Install the components you removed in the Before you begin section.




## **RAM** module




## Before you begin

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery


Push the clips outwards to remove the RAM module.



- 1. Align and insert the RAM module into the RAM module slot.
- 2. Install the components you removed in the *Before you begin* section.




# **Speakers**



## Before you begin

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery


- 1. Disconnect the speaker connector.
- 2. Remove the cable from the cable guide(s).
- 3. Remove the speakers.




- 1. Install the speakers.
- 2. Route the cable through the cable guide(s).

**IMPORTANT!** Damage may occur if cables are not properly routed through the cable guides. Confirm that all cables are routed through each of the indicated cable guides before proceeding.

- 3. Reconnect the speaker connector.
- Install the components you removed in the Before you begin section.



## **Heat sink**



## Before you begin


**IMPORTANT!** Thermal paste, thermal pads, liquid metal, or other thermal interface materials must be thoroughly removed and replaced if this component is removed. Ensure that replacement materials are available before proceeding, or contact an authorized service center for assistance.

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery

#### **Screw list**

- M2.0 X 4.0L (2pcs)
- M2.0 X 3.0L (4-6pcs)


1. Remove the screw(s), then remove the fan duct.




2. Remove the heat sink screw(s) one by one in the sequence shown in the illustration below, then remove the heat sink.

**IMPORTANT!** Vertically lift the heat sink using the left side of the heat sink to prevent damage.

#### 4-screw heat sink




#### 6-screw heat sink




 Install the heat sink, then secure the heat sink screw(s) one by one in the sequence shown in the illustration below.


#### 4-screw heat sink




#### 6-screw heat sink



- Install the fan duct, then secure the fan duct using the screw(s) you removed earlier.
- 3. Install the components you removed in the *Before you begin* section.



## Fan module




## Before you begin

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery
  - Heat sink


## **Screw list**

● M2.0 X 4.0L (3pcs)


- 1. Remove the tape, then disconnect the fan connector.
- 2. Remove the screw(s).
- 3. Remove the fan.



- 1. Install the fan.
- 2. Secure the fan using the screw(s) you removed earlier.
- 3. Reconnect the fan connector, then reattach the tape.
- 4. Install the components you removed in the *Before you begin* section.



# Smart card reader (on selected models)




## Before you begin

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery


#### **Screw list**

• M1.6 X 2.0L (4pcs)


Disconnect the cable and remove the screw(s), then remove the smart card reader.



- Install the smart card reader, then secure the smart card reader using the screw(s) you removed earlier and reconnect the cable.
- 2. Install the components you removed in the *Before you begin* section.



# **Display panel module**



## Before you begin

**IMPORTANT!** Do not bend the display panel in any way to avoid risk of display panel leakage.


- 1. Read the **Safety Precautions** and **Pre-repair Checklist**.
- 2. Remove the following components:
  - · Bottom cover
  - Battery

#### **Screw list**


● M2.5 X 4.5L (6pcs)

#### Removal


1. Place your device with the display panel hanging over the edge of the workspace as shown in the illustration below.




- 2. Remove the screw and remove the bracket, then disconnect the cable(s).
- 3. Remove the tape, then remove the cable(s) from the cable guide(s).




- Remove the polyester film and disconnect the cable(s) (if available).
- 5. Remove the cable(s) from the cable guide(s) (if available).




- 6. Disconnect the cable(s).
- 7. Remove the cable(s) from the cable guide(s).
- 8. Remove the screw(s).



## 9. Remove the display panel module.




 In the orientation shown, align and place the hinges of the display panel module on the screw holes.



- 2. Secure the hinges using the screw(s) you removed earlier.
- 3. Route the cable(s) through the cable guide(s).


**IMPORTANT!** Damage may occur if cables are not properly routed through the cable guides. Confirm that all cables are routed through each of the indicated cable guides before proceeding.

4. Reconnect the cable(s).



- Reconnect the cable(s) and reattach the polyester film (if available).
- 6. Route the cable through the cable guide(s) (if available).


**IMPORTANT!** Damage may occur if cables are not properly routed through the cable guides. Confirm that all cables are routed through each of the indicated cable guides before proceeding.




- 7. Reconnect the cable(s), then install the bracket and secure the bracket using the screw you removed earlier.
- 8. Route the cable(s) through the cable guide(s), then reattach the tape.

**IMPORTANT!** Damage may occur if cables are not properly routed through the cable guides. Confirm that all cables are routed through each of the indicated cable guides before proceeding.

9. Install the components you removed in the *Before you begin* section.



# I/O board




## Before you begin

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery
  - Heat sink
  - Fan module
  - · Display panel module


## **Screw list**

● ● M2.0 X 3.0L (1pc)


Remove the screw and disconnect the cable, then remove the I/O board.



- Install the I/O board, then reconnect the cable and secure the I/O board using the screw you removed earlier.
- 2. Install the components you removed in the *Before you begin* section.



## **Motherboard**



## Before you begin


- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery
  - M.2 SSD module
  - WLAN module
  - LTE module (on selected models)
  - Heat sink
  - Fan module
  - Display panel module

### **Screw list**


- M2.0 X 4.0L (4pcs)
- M2.0 X 2.0L (1pc)

### Removal

 Remove the tape, then disconnect the cable(s) from the motherboard.




2. Remove the screw(s), then remove the motherboard from the chassis.



#### Installation


1. Attach the polyester film to the bottom of the motherboard.

**NOTE:** This step is only required when you are replacing the existing component with a new one.




2. Flip the motherboard over, then attach the polyester film to the top of the motherboard.


**NOTE:** This step is only required when you are replacing the existing component with a new one.




3. Align and install the motherboard, then secure the motherboard using the screw(s) you removed earlier.



- 4. Reconnect the cable(s) to the motherboard, then reattach the tape.
- 5. Install the components you removed in the *Before you begin* section.



# **Touchpad**



# Before you begin


- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery

## **Screw list**


● M2.0 X 2.0L (8pcs)

## Removal

1. Disconnect the cable, then remove the polyester film.




2. Remove the screw(s) and remove the tape, then remove the touchpad.




## Installation


1. Install the touchpad, then reattach the tape and secure the touchpad using the screw(s) you removed earlier.



- 2. Reattach the polyester film, then reconnect the cable.
- 3. Install the components you removed in the *Before you begin* section.



# **Keyboard module**




## Before you begin

- 1. Read the Safety Precautions and Pre-repair Checklist.
- 2. Remove the following components:
  - Bottom cover
  - Battery
  - M.2 SSD module
  - WLAN module
  - LTE module (on selected models)
  - Speakers
  - Heat sink
  - Fan module

- Smart card reader (on selected models)
- Display panel module
- Motherboard
- Touchpad

#### Removal

Disconnect the cable and remove the tape, then remove the coin battery.




#### Installation

- Install the coin battery, then reconnect the cable and reattach the tape.
- 2. Route the cable(s) through the cable guide(s).


**IMPORTANT!** Damage may occur if cables are not properly routed through the cable guides. Confirm that all cables are routed through each of the indicated cable guides before proceeding.

Install the components you removed in the Before you begin section.



# **Appendix**

# Wiring and connection diagrams



- 1. LTE module connector\*
- 2. Fingerprint sensor connector
- 3. WLAN module connector
- 4. RAM module slot
- 5. Touch panel connector\*
- eDP connector
- I/O board connector
- 8. Fan connector
- 9. LAN connector
- 10. Coin battery connector
- 11. Smart card reader connector\*
- \* On selected models

- 12. Battery connector
- 13. Touchpad connector
- 14. Keyboard connector
- 15. Keyboard backlight connector\*
- 16. Speaker connector
- 17. M.2 SSD connector
- 18. Audio connector
- 19. USB Type-A connector
- 20. HDMI connector
- 21. USB Type-C<sup>®</sup> connector