


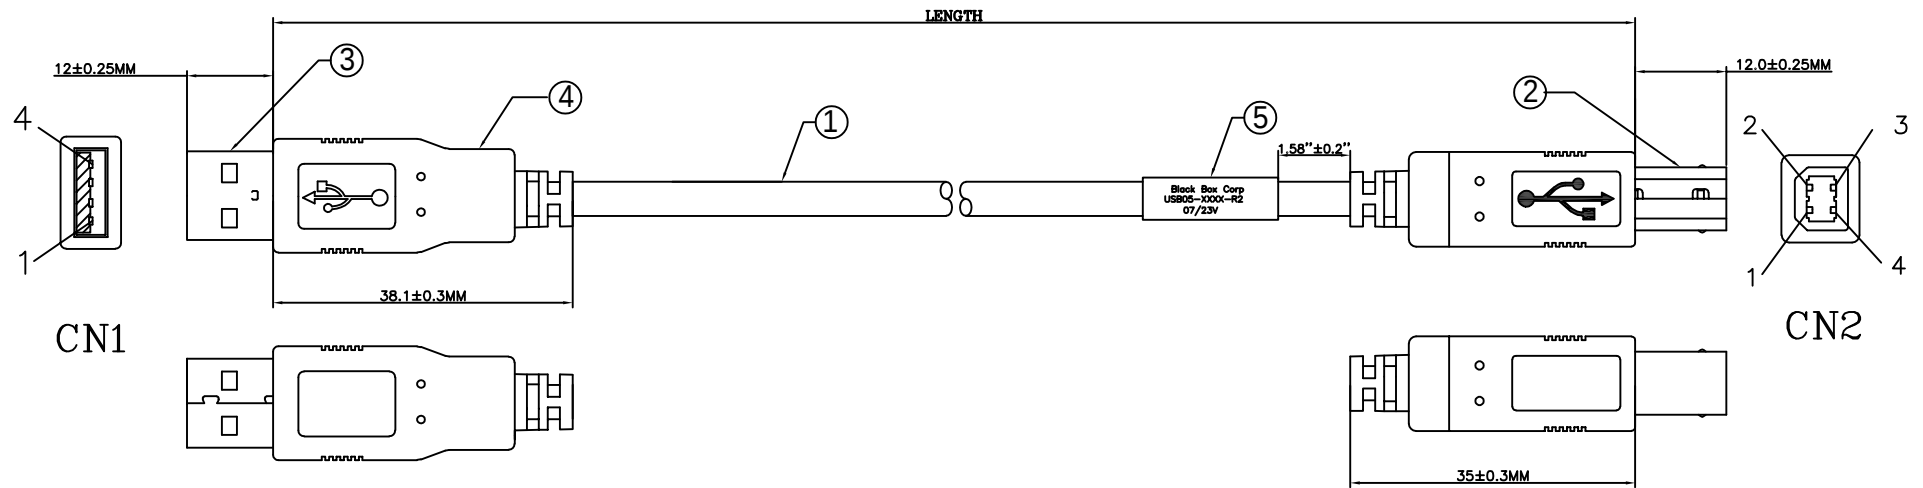

NOTE:

1.CABLE:USB2.0 28AWG#1PR+24AWG#*2C+AEB 85% COLOR:BLACK OD:4.5MM
MARKING:BLACK BOX CORPORATION(←25.4mm→)E223178 兄 AWM STYLE 2725 80℃
30V VW-1 USB Revision 2.0 C

2.CONNECTOR:USB B TYPE MALE PLUG WHITE RUBBER PIN GOLD PLATED G/F
NICKEL-PLATED HOUSING

3.CONNECTOR:USB A TYPE FEMALE TWO-PIECE PLUG WHITE RUBBER CORE
NICKEL-PLATED HOUSING

4.PVC MOLDED COLOR:BLACK


5.LABEL:BLACK BOX P/N LABEL

ELECTRONIC TEST:

- OPEN/SHORT/INTERMITTENCE:100%.
- CHARACTERISTIC IMPEDANCE:90±13.5Ω(TDR)
- DIELECTRIC STRENGTH: AC-500V/MIN
- INTRA-PAIR SKEW: 100ps/ CABLE
- Transmission rate 480M/S, 0.5A~10W(MAX)

ALL MATERIALS COMPLY WITH ROHS2(2015/863)

BBOX P/N	LENGTH
USBR05-0003-R2	3FT
USBR05-0006-R2	6FT

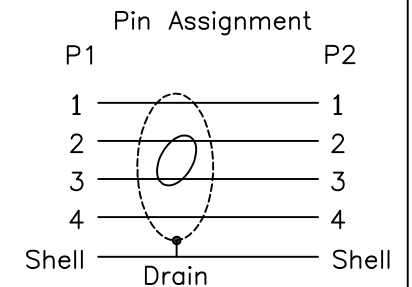

BLACK BOX				
Tolerance:	APPROVED BY:			
X ±				
.X ±	CHECK BY:		USB05-XXXX-R2	
.XX ±				
.XXX ±	DRAWN BY: Dong.MI		Description: USB2.0 AM to BM Cable	
Angel:				
X ±	DATE: 2023.09.12		DWG. NO:	
.X ±	Scale:	Unit mm	SHEET: 1 OF 1	
				REV:01

REV	ECN NO	DESCRIPTION	APPD.	DATE
-----	--------	-------------	-------	------