

Low Smoke Zero Halogen Trunk Cable Assemblies

specifications

Trunk Cable Assemblies shall allow for rapid deployment of high-density permanent links in a single assembly for data center applications requiring quick infrastructure deployment, such as main, horizontal, and zone distribution areas. These trunk cable assemblies shall optimize cable routing requirements to ensure efficient use of pathway space and significantly reduce installation time and cost. QuickNet™ Trunk Cable Assemblies are built with modular MPO connectivity and provide compatibility, flexibility and system performance in all permanent link applications. All trunk cable assemblies are factory terminated and tested to deliver verified optical performance and reliability for improved network integrity at speeds of 10/25/40/50/100G and beyond.



applications

Allows system designers to tailor configuration, reach and breakout construction to application requirements; to minimize waste, optimize cable management, speed deployment, improve flexibility and manageability for lower installation costs.

constructions

Cable type: Indoor Trunk

Cable jacket rating: Low Smoke Zero Halogen (LSZH)

Fiber types:
Singlemode: OS2 9/125µm
Multimode: OM3 50/125µm
OM4 50/125µm
OM5 50/125µm

Connector types end 'A': 12-fiber – MPO Female or Male,
12-fiber – PanMPO™ Female or Male

Connector types end 'B': 12-fiber – MPO Female or Male,
12-fiber – PanMPO™ Female or Male, Pigtail

Fiber count: 12, 24, 48, 72, 96, and 144

Jacket color:
OS2 Yellow
OM3 Aqua
OM4 Aqua
OM5 Lime

optical properties

Maximum cable attenuation:
Singlemode: 0.4dB/km at 1310nm
0.3dB/km at 1550nm
Multimode: 3.0dB/km at 850nm
1.0dB/km at 1300nm

Maximum connector insertion loss:
Standard Singlemode MPO: 0.75dB
Standard Multimode MPO: 0.50dB
Optimized Multimode MPO: 0.35dB
Ultra Multimode MPO: 0.25dB

Maximum connector return loss:
Singlemode: 55dB
Multimode: MPO 30dB
LC 26dB

physical properties

Cable outside diameter (OD):
12-fiber: 4.5mm
24-fiber: 5.4mm
48-fiber: 6.1mm
72-fiber: 9.4mm
96-fiber: 9.4mm
144-fiber: 11mm

Cable Construction:
12-fiber - 250µm Distribution Cable
24-fiber - 250µm Distribution Cable
48-fiber - 250µm Distribution Cable
72-fiber - Ribbon Distribution Cable
96-fiber - Ribbon Distribution Cable
144-fiber - Ribbon Distribution Cable

Minimum bend radius:
Under load: 20 × Cable OD
Static: 10 × Cable OD

Cable tensile strength:
12-fiber, 24-fiber and 48-fiber
440 N (100 lbs.)
72-fiber, 96-fiber and 144-fiber
1335 N (300 lbs.)

Cable compressive load: 100 N/mm

Connector durability: 500 mating cycles*

Breakout outside diameter: 3.0mm

Breakout length: 1m

*With proper cleaning and inspecting.

environmental properties

Operating temperature: -20°C to +70°C
(-4°F to 158°F)

Storage and shipping temperature: -40°C to +70°C
(-40°F to 158°F)

Installation temperature: -10°C to +60°C
(14°F to 140°F)

standards

Meets or exceeds: ISO/IEC 11801, TIA/EIA-568-C.3,
TIA-604-5 (FOCIS-5),
TIC/EIA-568-C.1, GR-409-CORE,
ICEA S-83-596 RoHS Compliant

Low Smoke Zero Halogen Trunk Cable Assemblies

part number configurator

Example: FYXTP77Y001F030 = OM3 12-Fiber HD Flex™ Indoor Small Diameter Trunk, LSZH, 1×12-fiber PanMPO™ Female with 1m breakout to 1×12-fiber PanMPO™ Female with 1m breakout, Polarity B, Optimized IL, Pulling Eye End A, 30 meters.

CHARACTER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
EXAMPLE	F	Y	X	T	L	7	7	Y	0	0	1	M	0	3	0

1 – Fiber

F = Fiber

2 – Cable Type

T = Indoor trunk cable (72 – 144 fibers)

Y = Indoor small diameter trunk cable (12 – 48 fibers)

3 – Fiber Type

9 = OS2 Singlemode 9/125µm

X = OM3 50/125µm

Z = OM4 50/125µm

W = OM5 50/125µm

4 – Fiber Count

T = 12 fibers

U = 24 fibers

W = 48 fibers

X = 72 fibers

Y = 96 fibers

A = 144 fibers

5 – Jacket Type

L = LSZH

6 – Connector Type (End A)

5 = 12-fiber MPO Female

6 = 12-fiber MPO Male

7 = 12-fiber PanMPO™ Female

8 = 12-fiber PanMPO™ Male

7 – Connector Type (End B)

5 = 12-fiber MPO Female

6 = 12-fiber MPO Male

7 = 12-fiber PanMPO™ Female

8 = 12-fiber PanMPO™ Male

U = Pigtail

8 – Construction/Performance

A = Method A, Standard IL (Singlemode)

B = Method B, Standard IL Singlemode)

X = Method A, Optimized IL

Y = Method B, Optimized IL

K = Method A, Ultra IL (12 – 48 fibers)

L = Method B, Ultra IL (12 – 48 fibers)

9 – 11 – Serial

12 – Unit of Measure


M = Meters

13, 14, 15 – Cable Assembly Length

005 – 999 Meters

Serial	Transition	Pulling Eye
001	HD Flex™	Yes
002	HD Flex™	No
003	HD Flex™ to pigtail	Yes
005	Standard	Yes
006	Standard	No
007	Standard to pigtail	Yes

small diameter trunk cable assembly detail

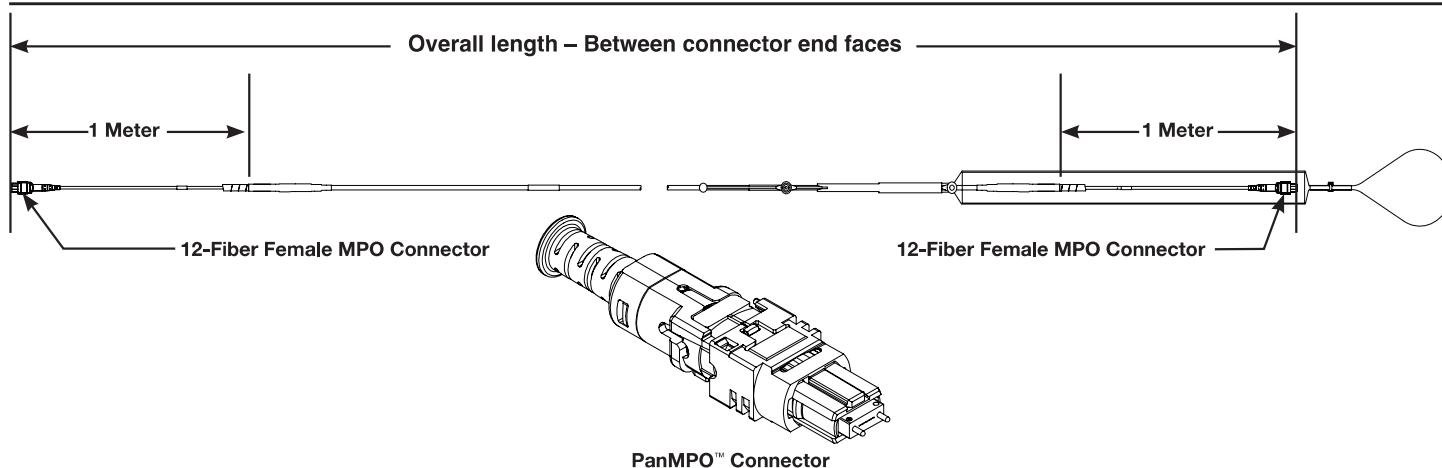

Please contact Panduit customer service for information on additional part number options.

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

© 2022 Panduit Corp.
ALL RIGHTS RESERVED.
FBSP164--WW-ENG
1/2022