



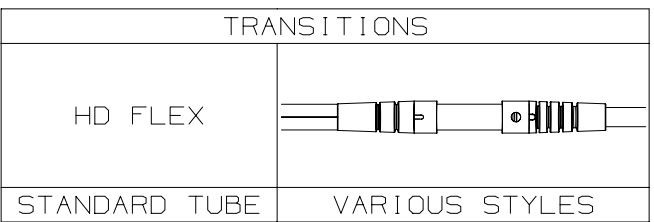

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


- NOTES:
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
 - ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
 - SINGLEMODE MPO AND SINGLEMODE PANMPO ARE ANGLED POLISH (APC)

LSZH CABLE		
FIBERS	CABLE TYPE	DIA. (mm)
12	SMALL DIA. INDOOR	4.8
24	SMALL DIA. INDOOR	5.4
48	SMALL DIA. INDOOR	6.1
72	INDOOR	9.4
96	INDOOR	9.4
144	INDOOR	11

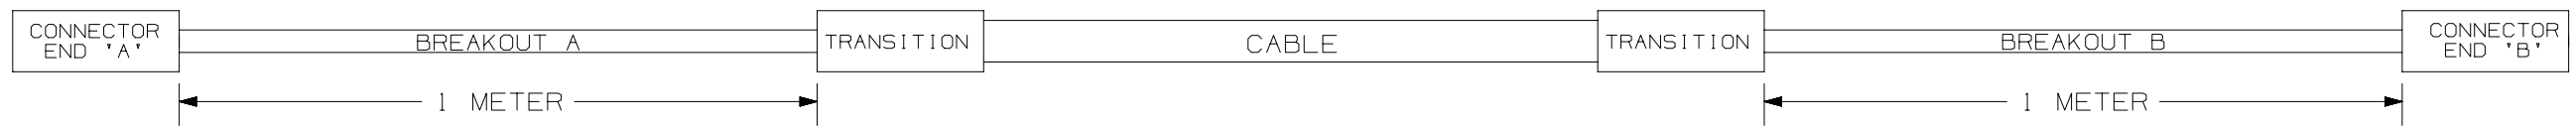

SEE "SERIAL" COLUMN IN TABLE LOCATED ON SHEET 2.

CONNECTORS	
12F FEMALE MPO	
12F MALE MPO	
12F FEMALE PANMPO	
12F MALE PANMPO	
24F FEMALE MPO	
24F MALE MPO	



TYPICAL PULLING EYE

NOMINAL PULLING EYE DIAMETERS FOR PANMPO/MPO TRUNKS	
FIBERS	(mm)
12	28
24	28
48	53.3
72	53.3
96	53.3
144	53.3
PIGTAILS	28

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00C	5/30/23	JSP	FJDU	EJH	B. REMOVED OM5 FROM DRAWING. SEE 01608AAJ-DC.	01608AAD-DC
00B	5/23/23	JSP	FJDU	EJH	A. ADDED 008 TO SERIAL #.	01608AAD-DC
00A	10/29/19	JSP	FJDU	EJH	INITIAL RELEASE	01608AAD-DC

PART NUMBER		SEE CONFIGURATOR ON SHEET 2	
TITLE			
CONFIGURE TO ORDER 12F TO 144F MPO/PanMPO TRUNK LSZH CABLES			
CUSTOMER DRAWING			
ITEM REVISION NAME		01608AAD/00	
DATASET FILE NAME		01608AAD_DC/00C	
		THIRD ANGLE PROJECTION	
MATERIAL		MULTIPLE	
DRAWING NUMBER		01608AAD-DC	
DRAWN BY	DATE	CHK	SCALE
JSP	10/28/19	FJDU	NONE
SHEET 1 OF 2			SIZE
			B

B

B

A


A

B-SIZE CUSTOMER



CHARACTER	1	2	3	4	5	6	7	8	9-11	12	13-15
ATTRIBUTE	FIBER	PRODUCT/CABLE TYPE	FIBER TYPE	FIBER COUNT	FLAME RATING	CONNECTOR TYPE (END 'A')	CONNECTOR TYPE (END 'B')	POLARITY/PERFORMANCE	SERIAL	UNITS	LENGTH (TIP TO TIP)
OPTIONS	F	T= INDOOR TRUNK Y= SMALL DIA INDOOR TRUNK	9= SM	T= 12F	L= (LSZH)	5= 12F MPO, FEMALE	5= 12F MPO, FEMALE	A= POLARITY A- STANDARD IL	XXX= SEE TABLE BELOW	F= FEET	015 - 999 FEET 5 - 400 METERS
			S= OM4+	U= 24F		6= 12F MPO, MALE	6= 12F MPO, MALE	B= POLARITY B- STANDARD IL		M= METERS	
			X= OM3	W= 48F		7= 12F PANMPO, FEMALE	7= 12F PANMPO, FEMALE	K= POLARITY A- ULTRA LOW IL			
			Z= OM4	X= 72F		8= 12F PANMPO, MALE	8= 12F PANMPO, MALE	L= POLARITY B- ULTRA LOW IL			
				Y= 96F		E= 24F MPO, FEMALE	E= 24F MPO, FEMALE	X= POLARITY A- OPTIMIZED IL			
				A= 144F		F= 24F MPO, MALE	F= 24F MPO, MALE	Y= POLARITY B- OPTIMIZED IL			
				U= PIGTAIL							

"SERIAL" COLUMN FROM ABOVE					
SERIAL #	TRANSITION TYPE	BREAKOUT A LENGTH	BREAKOUT B LENGTH	PULLING EYE	DESCRIPTION
001	HD FLEX	1 METER	1 METER	END A ONLY	HD FLEX WITH PULLING EYE
002				NONE	HD FLEX WITHOUT PULLING EYE
003			NONE	END B ONLY	HD FLEX PIGTAIL WITH PULLING EYE
005	STANDARD		1 METER	END A ONLY	STANDARD WITH PULLING EYE
006				NONE	STANDARD WITHOUT PULLING EYE
007			NONE	END B ONLY	STANDARD PIGTAIL WITH PULLING EYE
008				NONE	STANDARD PIGTAIL NO PULLING EYE

PART NUMBER		SEE CONFIGURATOR ABOVE	
TITLE			
CONFIGURE TO ORDER 12F TO 144F MPO/PanMPO TRUNK LSZH CABLES			
CUSTOMER DRAWING			
ITEM REVISION NAME		01608AAD/00	
DATASET FILE NAME		01608AAD_DC/00C	
		THIRD ANGLE PROJECTION	
MATERIAL		MULTIPLE	
DRAWING NUMBER		01608AAD-DC	
DRAWN BY	DATE	CHK	SCALE
JSP	10/28/19	FJDU	NONE
SHEET 2 OF 2			B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
					SEE REVISIONS ON SHEET 1	0160AAD-DC

B-SIZE CUSTOMER