
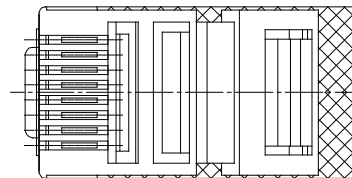
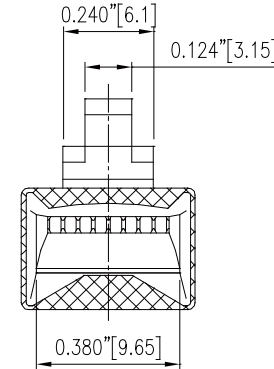
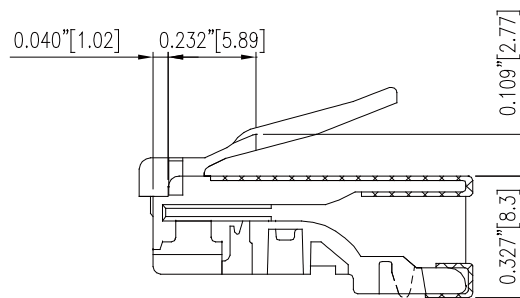
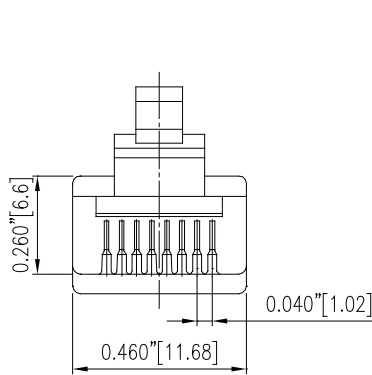


REVISIONS		
Rev	DESCRIPTION	DATE
A	INITIAL RELEASE	2015.03.16



MATERIAL
 Overall Shield: Copper C2680, t=0.009 in (0.25 mm), plated with 30 μin (0.67 μm) nickel
 Housing: High-impact Polycarbonate (PC resin), UL 94 V-2 rated, transparent
 Blades: Phosphor bronze, plated with 50 μin (1.27 μm) minimum thick hard gold over 100 μin (2.54 μm) minimum thick nickel underplate on contact area
 RoHS compliant

WIRE RANGE
 Conductor Diameters: 0.016 in (0.41 mm) 26 AWG - 0.020 in (0.51 mm) 24 AWG
 Insulation Diameters: 0.032 in (0.8 mm) - 0.039 in (1.0 mm)
 Cable Diameters: 0.197 in (5 mm) - 0.354 in (9 mm)

Blades	2-prong	Angled 2-prong	Angled 3-prong	Long Angled 3-prong				
Drawing								
Mark								
Gold Plating	3μ"	6μ"	15μ"	30μ"	50μ"	Cable Type	Round	Flat
Mark								

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ±
 ANGULAR: MACH ± BEND ±
 TWO PLACE DECIMAL ±
 THREE PLACE DECIMAL ±



NAME	DATE	TITLE	
DRAWN Rita Lee	2015.03.16	Category 5e Modular Plugs Shielded - xxx Pack	
ENG APPR. Kihai Lee	2015.03.16		
CHECKED Max Wang	2015.03.16		
COMMENTS:		SIZE DWG. NO.	REV
DO NOT SCALE DRAWING		B C5E-MP-S-XXXXPAK	A
		SCALE: X	SHEET 1 OF 1

DIMENSIONS ARE IN[MM]				TOLERANCES:	
-0.787[20]	-1.969[50]	-5.906[150]	5.906[150]	ANGLE	
+0.008[0.2]	+0.016[0.4]	+0.020[0.5]	+0.059[1.5]	±2°	
3rd Angle Projection					

The information contained in this document is the sole property of Black Box Corporation of Pennsylvania. Any reproduction in part or whole without the written permission of Black Box Corp. is prohibited.
 ©Copyright 2012 Black Box Corporation of Pennsylvania d/b/a Black Box Network Services. All Rights Reserved.

INTERPRET GEOMETRIC TOLERANCING PER:
 MATERIAL
 FINISH
 DO NOT SCALE DRAWING