



UPO11 AX i

online UPS

High performance double conversion

3kVA



*For critical tasks and
corporate applications*



UPO11-3 AX i

UPS online

High performance double conversion for critical loads and corporate applications

Features



- Single chip microprocessor.
- Double conversion technology.
- Output frequency regulation.
- Pure sine wave at the output.
- Corrects low and high voltages without the use of batteries.
- Zero transfer time.
- Correct 99% of electrical problems.
- Cold start.
- Overload quickly recover.
- Ideal for medical equipment protection, laboratory equipment, data sensitive servers and telecommunications equipment.
- Total isolation from the utility.
- Maximizes the performance, life span and reliability of the batteries through a smart and precise charging.
- Protects critical loads against brief and prolonged overloads, surges and other electrical problems.
- Converts the input AC supply into DC and once more into AC.
- Frequency conversion capable.
- 0.9 output power factor.

Safe

User friendly LCD Display




Shows input and output voltages, backup time and battery charge.





UPO11-3 AX i UPS online

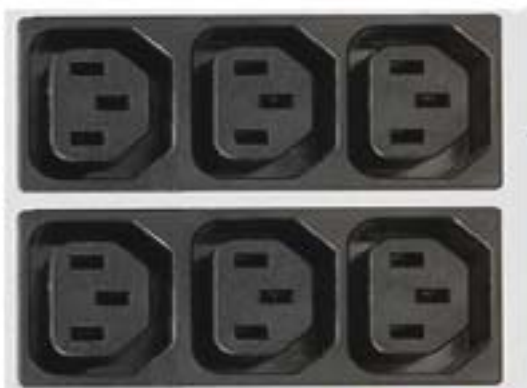

6 output outlets IEC-C13/14
of which 3 terminals output are
programmable

AC power



SNMP slot

2 Cooling Fan



Hard wire outlet

External battery
bank input



USB

RS232



Communication ports

Protection breaker



Optional SNMP and control PCB



Corporate applications and critical loads solutions

UPO11-3 AX i

Model		UPO11-3 AX i
Capacity		3000VA / 2700W
Input		220VAC nominal voltage
Voltage range		160VAC - 300 VAC \pm 3%
Frequency range		40Hz - 70Hz
Power factor		≥ 0.99 @ nominal voltage (full load)
Output		
Output voltage		200/208/220/230/240 VAC
AC voltage regulation		$\pm 1\%$
Frequency range	Battery mode	50 Hz ± 0.1 Hz 60 Hz ± 0.1 Hz
Crest factor		3:1
Overload		100%- 110 Alarm; 110/130 Battery mode the UPS shuts down in 30 seconds / normal mode the UPS transfers to bypass mode when the utility is normal; >130% battery mode the UPS shuts down immediately / normal mode of the UPS transfers to bypass when the utility is normal.
Harmonic distortion		$\leq 2\%$ THD (linear load) $\leq 4\%$ THD (non linear load)
Transfer time	AC mode to battery mode	Zero
Wave form		Pure sine
Efficiency		
AC mode		90%
Eco Mode		97%
Batteries		
Type/Quantity		12V/9Ah x 6
Recharge time		3 hours to 95% (typical)
Charge current		1,0 Ah (max)
Charge voltage		82,1 VDC $\pm 1\%$
Backup time		6 minutes full charge / 15 minutes half charge
Physical		
Dimensions	(D x H x W)	421x318x190mm
Net weight		28 Kg
Environment		
Humidity		0-90% RH @ 0-45°C (non condensation)
Noise level		Less than 50 dBA @ 1 meter
Control		
Smart RS232 or USB		Supports Windows 2000 / 2003 / XP / Vista / 2008 / 7, 8, 10, Linux and Mac
Optional SNMP		SNMP control & web browser (via internal SNMP or SNMPDB9)
Certifications		NOM, ISO9001, ISO14001, CIDET, TÜV, UL

Specifications are subject to change without notice

CDP COLOMBIA
colombia@cdpups.com



CDP GUATEMALA
guatemala@cdpups.com



CDP PERÚ
peru@cdpups.com



CDP USA
usa@cdpups.com



CDP ECUADOR
ecuador@cdpups.com



CDP CHINA
china@cdpups.com



CDP COSTA RICA
costarica@cdpups.com



CDP VENEZUELA
venezuela@cdpups.com



CDP HONG KONG
hongkong@cdpups.com



CDP MÉXICO
mexico@cdpups.com

