


Key Features

- 3,500 ANSI Lumens with native Full HD 1080p
- Energy-efficient SuperEco+ Mode for lamp life up to 20,000hrs
- Vertical lens shift
- vColorTuner to exchange color profile and adjustment easier
- Projector software update tool to easily upgrade your functionality up to date



Product Description

The ViewSonic PX701HDH is a high brightness 3,500 ANSI lumens projector featuring a Full HD 1080p resolution that offers impressive visual performance in a brightly lit living room or meeting room. The projector adopts the latest lamp design to extend lamp life of up to 20,000 hours under SuperEco+ mode, effectively reducing lamp replacement and maintenance costs. A digital lens shift allows users to make adjustments by remote control, it's also compatible with the vColorTuner function for color profile exchange and adjustments. The dual HDMI inputs and USB power supply allow users to connect to a multitude of multimedia devices for gaming, movies, or a wireless dongle for wireless presentation.

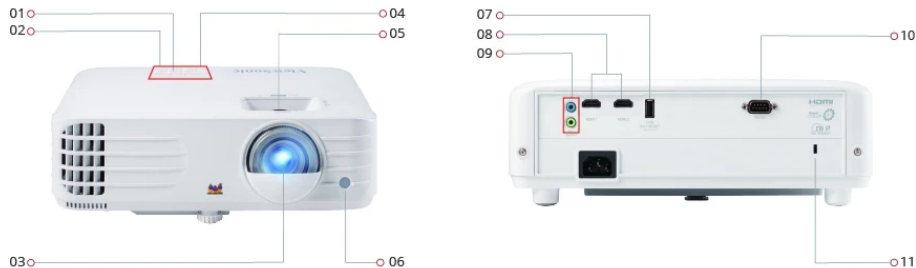

1. Keypad
2. LED Indicator
3. Power Key
4. Zoom/Focus
5. Projection Lens
6. Front IR
7. Audio In/Out

8. HDMI
9. USB Type A
10. RS232
11. Kensington Lock

VENDOR

Vendor: Qisda

SPECIFICATION

Native Resolution: 1920x1080

DMD Type: DC3

Brightness: 3500 (ANSI Lumens)

Contrast Ratio with SuperEco Mode: 12000:1

Display Color: 1.07 Billion Colors

Light Source Type: Lamp

Light Source Life (hours) with Normal Mode: 5000

Light Source Life (hours) with SuperEco Mode: 20000

Lamp Watt: 203W

Lens: F=2.0-2.05, f=15.843-17.445mm

Projection Offset: 110%+/-6%

Throw Ratio: 1.5-1.65

Optical Zoom: 1.1x

Digital Zoom: 0.8x-2.0x

Image Size: 30"-300"

Throw Distance: 1m-10.96m(100"@3.32m)

Keystone: +/- 40° (V)

Lens Shift V. Range: +/- 5% (Digital)

Audible Noise (Normal): 31dB

Audible Noise (Eco): 27dB

Input Lag: 16ms

Resolution Support: VGA(640 x 480) to WUXGA_RB(1920 x 1200)*RB-Reduced Blanking

HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p

Video Compatibility: NTSC, PAL, SECAM

Horizontal Frequency: 15K-102KHz

Vertical Scan Rate: 23-120Hz

INPUT

HDMI: 2 (HDMI 1.4/ HDCP 1.4)

Audio-in (3.5mm): 1

OUTPUT

Audio-out (3.5mm): 1

Speaker: 10W

USB Type A (Power): 1 (5V/1.5A)

CONTROL

RS232 (DB 9-pin male): 1

USB Type A (Services): 1(share with USB A Output)

OTHERS

Power Supply Voltage: 100-240V+/- 10%, 50/60Hz(AC in)

Power Consumption: Normal: 300WStandby: <0.5W

Operating Temperature: 0~40°C

Carton: Brown

Net Weight: 2.59kg

Gross Weight: 3.75kg

Dimensions (WxDxH) with Adjustment Foot: 312x222x108mm

Packing Dimensions: 415x168x297mm

OSD Language: English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages

User Guide Language: English, S-Chinese, T-Chinese, Indonesian, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, Total 20 languages

STANDARD ACCESSORY

Power Cord: 1

Remote Control: 1

QSG: Yes

Warranty Card: Yes (CN Only)

OPTIONAL ACCESSORY

Lamp/Light Source: RLC-119

Wall/Ceiling Mount: PJ-WMK-007

Carry Bag: PJ-CASE-008