


# Specifications

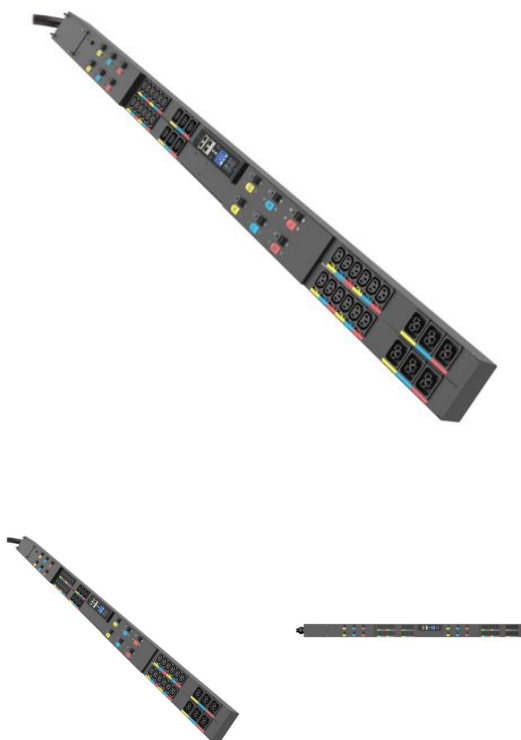

Eaton

## EMAGFFC3C3C3L

3-Phase Managed HDX Rack PDU G4,  
240/415V, 36 Outlets (24 C13 + 12 C39), 60A,  
35kW, 560P6W Input, 6 ft. Cord, 0U Vertical,  
TAA

### General specifications

<b>PRODUCT NAME</b>	Eaton managed PDU
---------------------	-------------------

<b>CATALOG NUMBER</b>	EMAGFFC3C3C3L
-----------------------	---------------

<b>UPC</b>	037332296283
------------	--------------

<b>PRODUCT LENGTH/DEPTH</b>	2.48 in
-----------------------------	---------

<b>PRODUCT HEIGHT</b>	69.45 in
-----------------------	----------

<b>PRODUCT WIDTH</b>	4.09 in
----------------------	---------

<b>PRODUCT WEIGHT</b>	28.02 lb
-----------------------	----------

<b>COMPLIANCES</b>	CE Marked FCC Class A TAA Compliant
--------------------	---

<b>CERTIFICATIONS</b>	UL Listed cUL Listed
-----------------------	-------------------------



Powering Business Worldwide

## Product specifications

<b>FORM FACTOR</b>	0U (Vertical)
<b>PHASE</b>	3-Phase
<b>INPUT CONNECTION</b>	Other
<b>OUTLETS</b>	36
<b>CORD LENGTH</b>	6 ft
<b>FREQUENCY RATING</b>	50/60 Hz
<b>OPERATING TEMPERATURE</b>	0° to 60°C (32° to 140°F)

## Resources

---

**PROJECT NAME:**

**PROJECT NUMBER:**

**PREPARED BY:**

**DATE:**

---



### Eaton Corporation plc

Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

