




LCD Monitor Quick Start Guide

DesignVue Designer Monitor | PD Series





DN: PD06U-EQ-V1

© 2022 BenQ Corporation. All rights reserved. Rights of modification reserved.

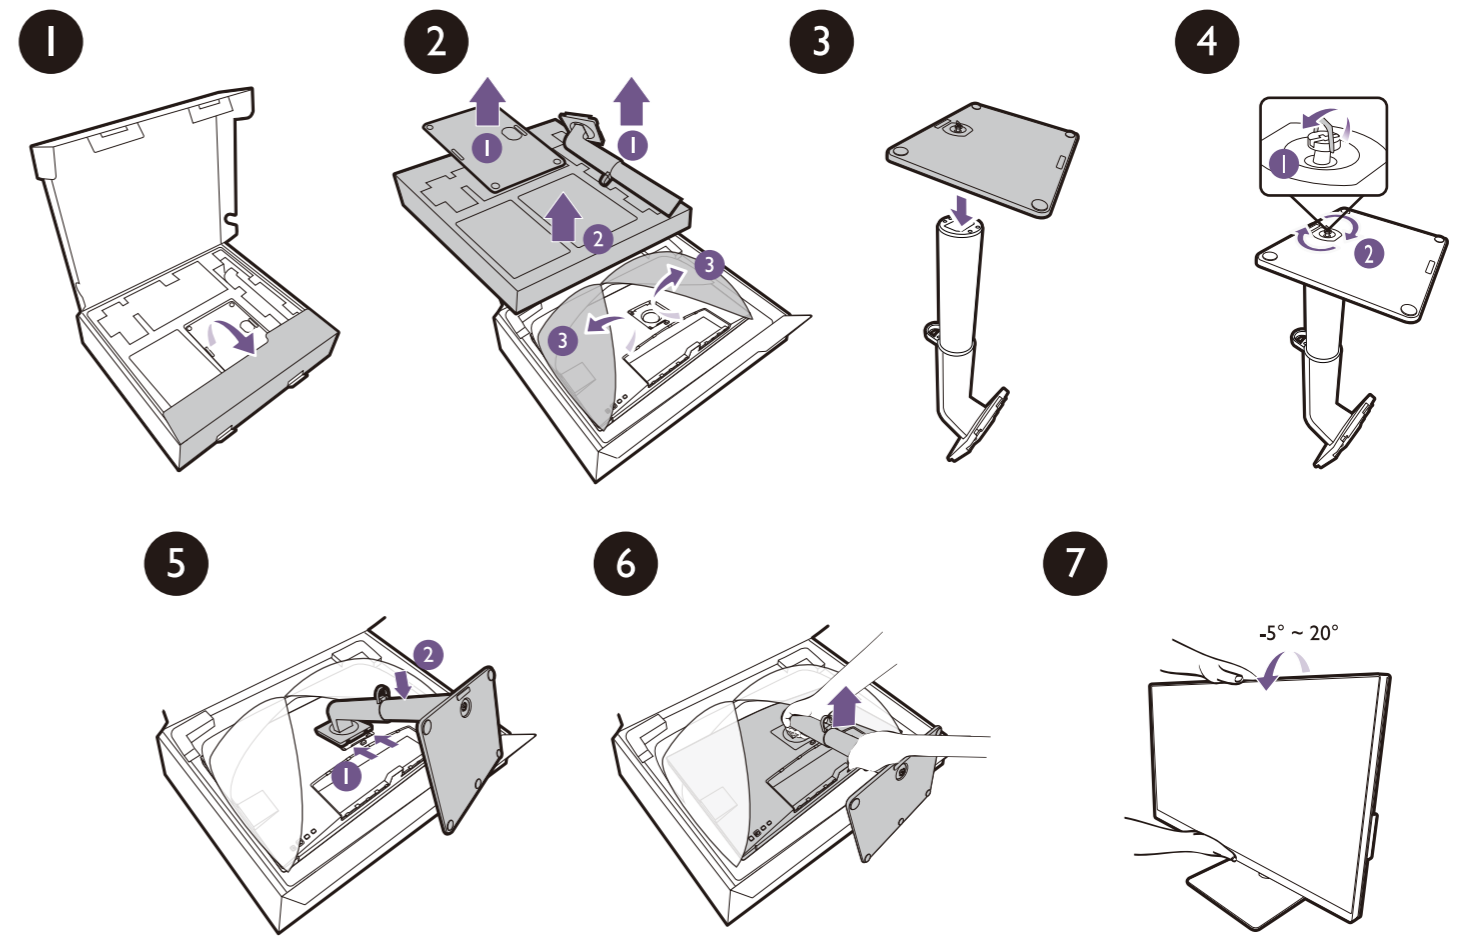

- 8 Video
- 9 Audio
- 10 USB
- 11 Hotkey Puck G2

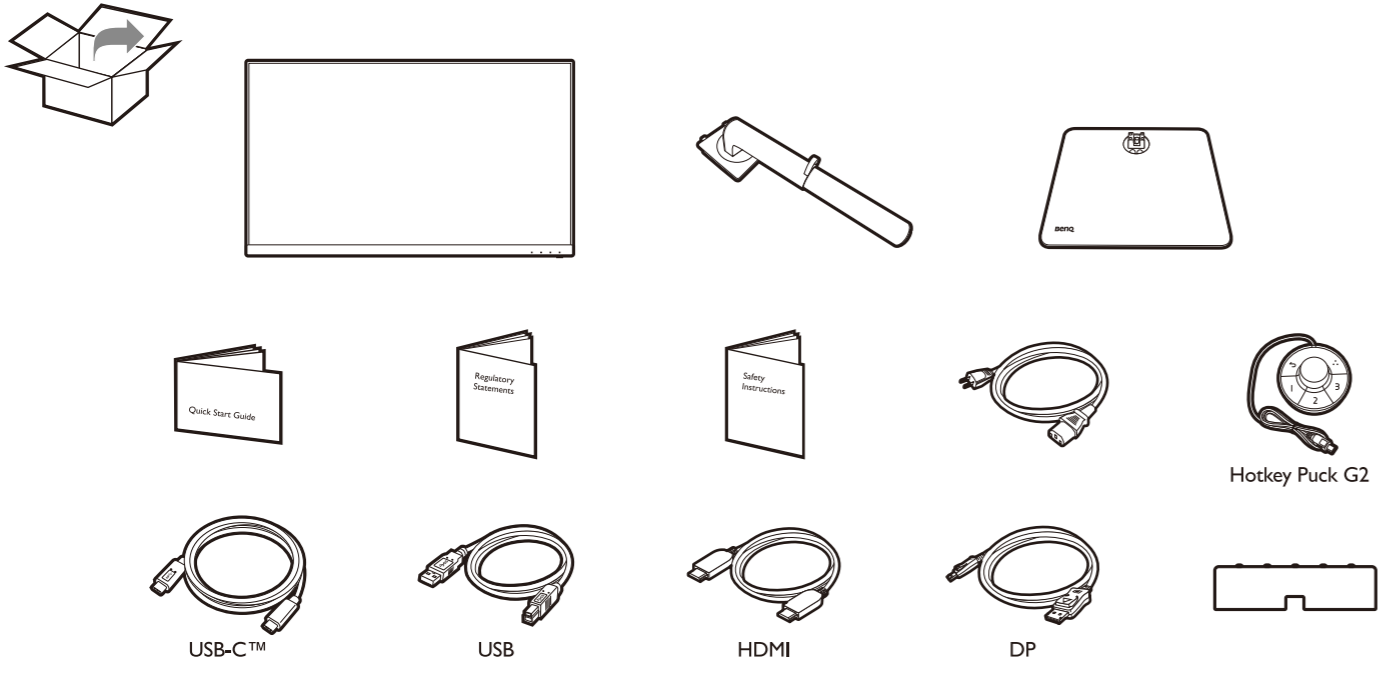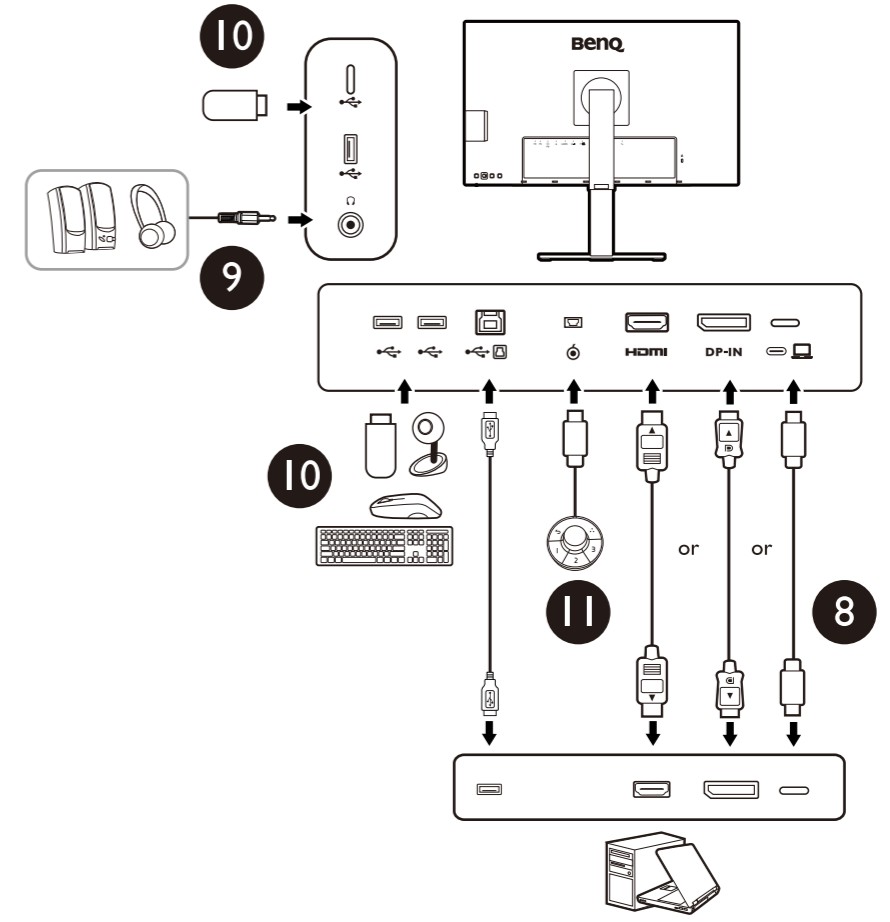

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade Dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

ecoFACTS
csr.BenQ.com

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE
(For models with HDMI inputs)

P/N: 4JXXXXX.XXX


Environmental specifications:

- Operating Temperature: 0-40°C
- Storage Temperature: -20-60°C
- Humidity: 10-90%
- Power Consumption: 0-3000m
- Power Consumption: 10-60%
- Power Consumption: 0-12000m


How to use Hotkey Puck G2




12

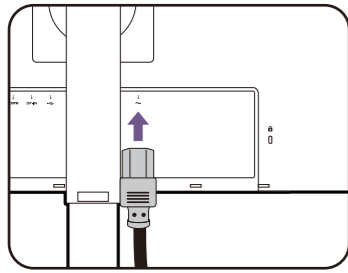


13

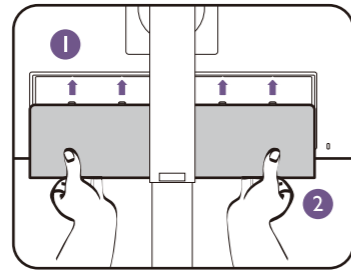



14




15

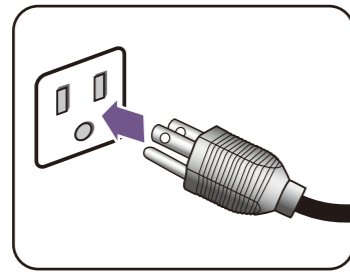

16

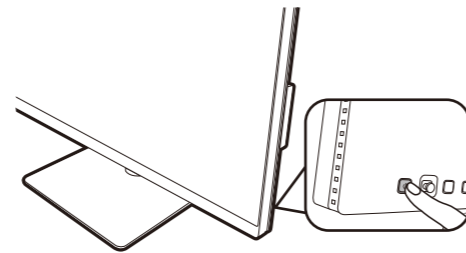


1

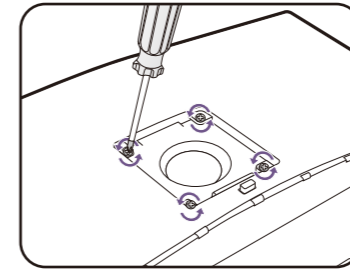


M4 x 10 mm

2

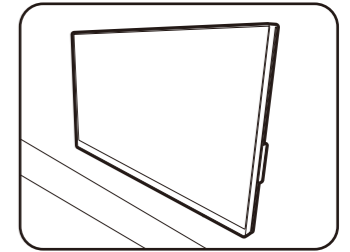


Working with multiple inputs with one set of keyboard and mouse (KVM Switch)

Connections


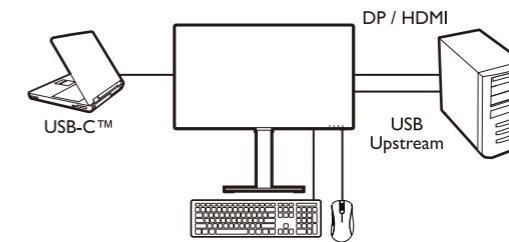


Switch of KVM sources

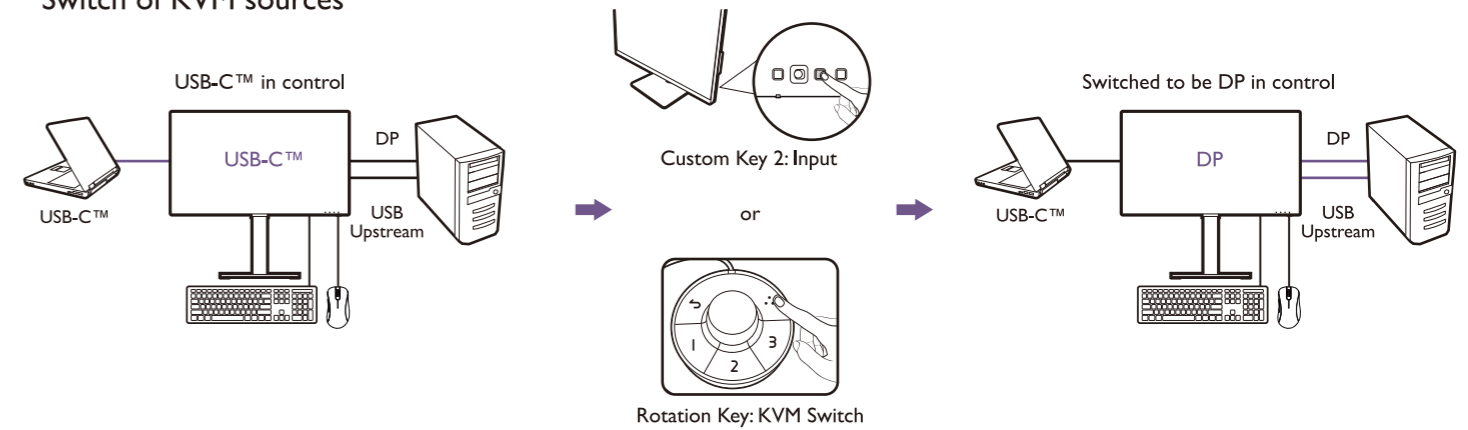


Software installation


Display Pilot: for display arrangement & color matching (ICCsyntax)

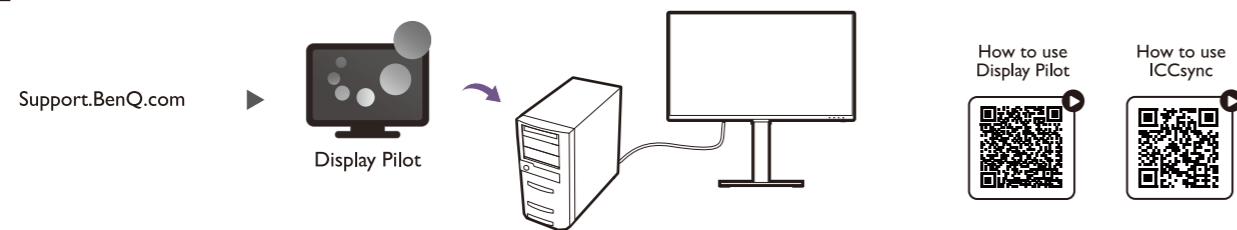


1




2

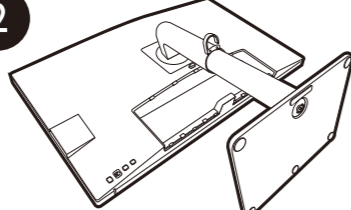


3

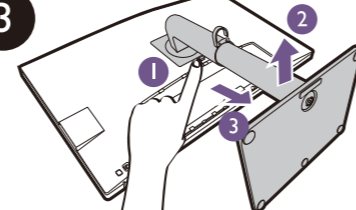

4



5



Support.BenQ.com



Online Manual



Product Support



Software Download

For professional color display



CAD / CAM Mode



Animation Mode

For work efficiency



KVM Switch