



# Gateway6 4mG

Cloud-managed VPN Router with 4 x 2.5-Gigabit (1x PoE+) Ethernet ports (ESG610)

## Introduction

This Quick Start Guide is designed to guide you through the installation of the **Gateway6 4mG**, model **ESG610**, including hardware mounting and configuration.

### Gateway6 4mG

## Cloud-Managed VPN Router with 4 x 2.5-Gigabit (1x PoE+) Ethernet ports

### Model: ESG610

- 4 x 2.5G Ports to unleash elevated speeds for NAS, workstations, or Wi-Fi 6 APs
- 1 x PoE+ port for a wide range of networking devices such as IP cameras, VoIP phones, workstations and more


### ∨ Content Quick Links

[Hardware Overview](#)

[Hardware Installation](#)

[Configure with EnGenius Cloud](#)

## Package Contents

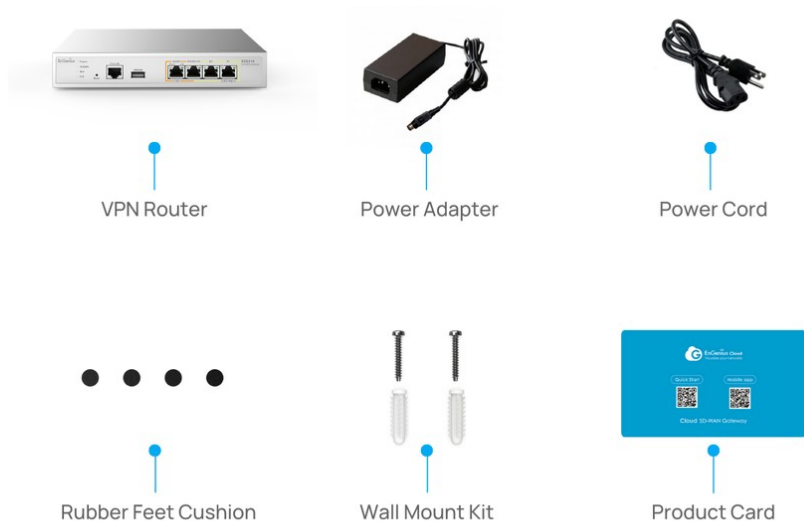

## System Requirements

The EnGenius Cloud is primarily accessible with a web browser or mobile app. Before signing up for the EnGenius Cloud Service or logging on to the EnGenius Cloud Platform to manage your network, ensure that you've downloaded the right app and used the supported browser.

### Mobile App:

EnGenius Cloud To-Go (iOS/Android)



[↓ Download the Cloud To-Go mobile app here ↗](#)

## Web Browser:


- Google Chrome (57.0.2987.110 and later)
- Microsoft Edge (80.0.361.103 and later)
- Mozilla Firefox (52.0 and later)

## Network Requirements

Before you get started, please make sure the WAN access method in your network environment which will be used to connect this VPN Router device to the Internet; by default, EnGenius Cloud-managed VPN Router (ESG-series) is able to assign IP addresses by its internal DHCP server when users connect their client devices to LAN ports (P1, P2, or P3 port).

## Hardware Overview

### Ports

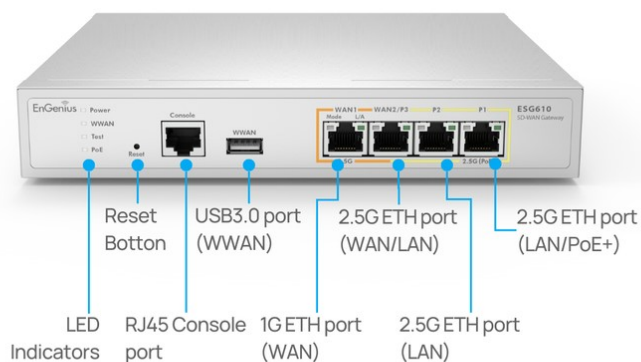



- **Reset to default:** Press and hold the reset button more than 10 seconds, and the **Power/WWAN/Debug/PoE** LED will become Flashing. Then, the device will be reset to factory default settings.

## LEDs


Location	LED Indicator	LED Color	LED Behavior	Status	
System	Power	Orange	Flashing	Power On	
		Green	Flashing	Connecting to the Cloud	
		Solid On	Cloud Connected		
		Green/Orange	Flashing	Firmware Upgrading	
		Green	Flashing	Reset to Default by HW Button (Push over 10 sec)	
	WWAN	Orange	Flashing	Gateway Locating	Reset to Default by HW Button (Push over 10 sec)
			Flashing	Reset to Default by HW Button (Push over 10 sec)	Gateway Locating
	Test	Blue	Flashing	Reset to Default by HW Button (Push over 10 sec)	Gateway Locating
			Flashing	Reset to Default by HW Button (Push over 10 sec)	Gateway Locating
	PoE	Green	Solid On	Providing PoE Power	
Ethernet Port	Left (Link Speed)	Orange	Solid On	2.5G	
		Green	Flashing	1G	
		Off	Light Off	100M/10M/No Link	
	Right (Status)	Green	Solid On	Link	
		Flashing	Transmit		
		Off	Light Off	No Link	

## Hardware Installation

The VPN Router can be placed on a flat surface or installed on the wall. Please perform the following steps to install:


### Place on a Flat Surface

Attach the **Rubber Footpads** at the bottom of the **VPN Router** at each corner. The **Rubber Footpads** help secure the **VPN Router** and protect it from vibration and shock when stacking.

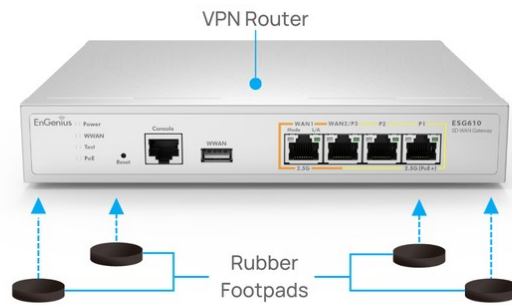

## Wall Mount

To mount the **VPN Router** on a wall, install the two provided **Screws** in positions that correspond to the slots on the bottom side of the **VPN Router**, then mount the **VPN Router**.

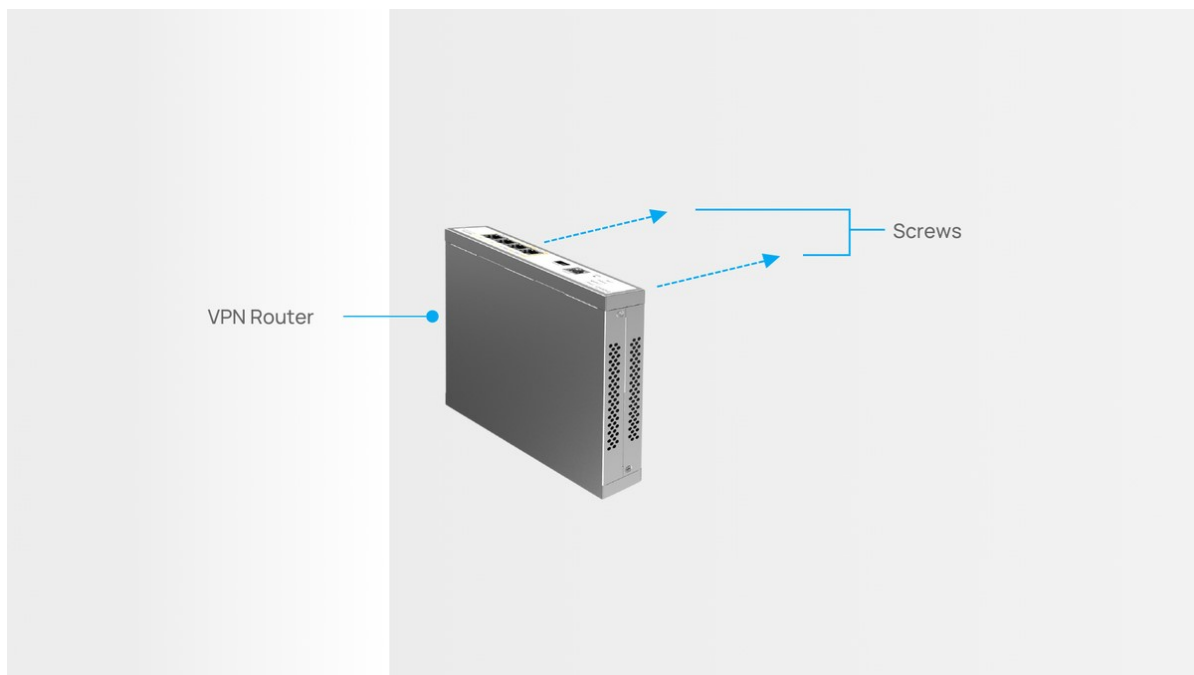

# Configure with EnGenius Cloud

## Step1: Register Device

You can register the device either by **Cloud To-Go mobile app** or the **EnGenius Cloud platform**.

### Cloud To-Go Mobile App



1. Open and log in to the **EnGenius Cloud To-Go** mobile app.
2. Scan the QR code on the back of the device via the app.



Scan to Register

3. If the camera successfully scans a QR code, the app will display the Device Information. You could tap "**Register**" to complete the Registration.


4. Registered devices will be shown on the **Inventory & License** page. Upon sliding left the device, you can click "**Add to Network**" to add the device to your designated Network.

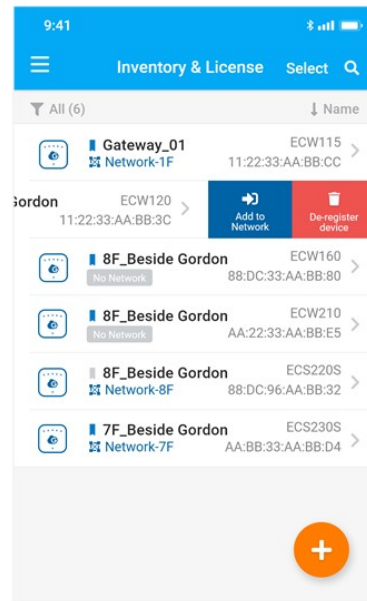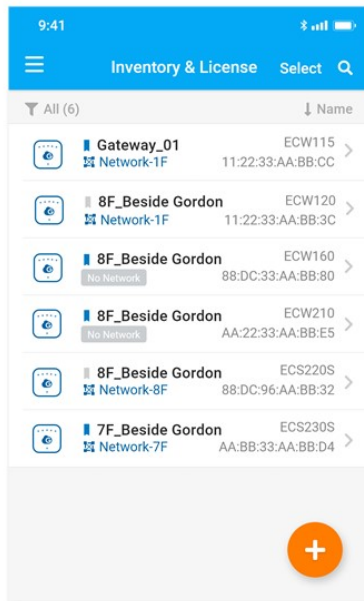

 **Network:** Management domain shared same configurations within EnGenius Cloud.


## EnGenius Cloud Platform

1. Log into the **EnGenius Cloud Platform**: <https://cloud.engenius.ai/> ↗.
2. Go to the **home > Inventory** page and click "**Register Device**".
3. Enter the **Serial Number** of the device(s) for device registration. Please refer to "[User Manual-Registering Devices to Organization](#) ↗".

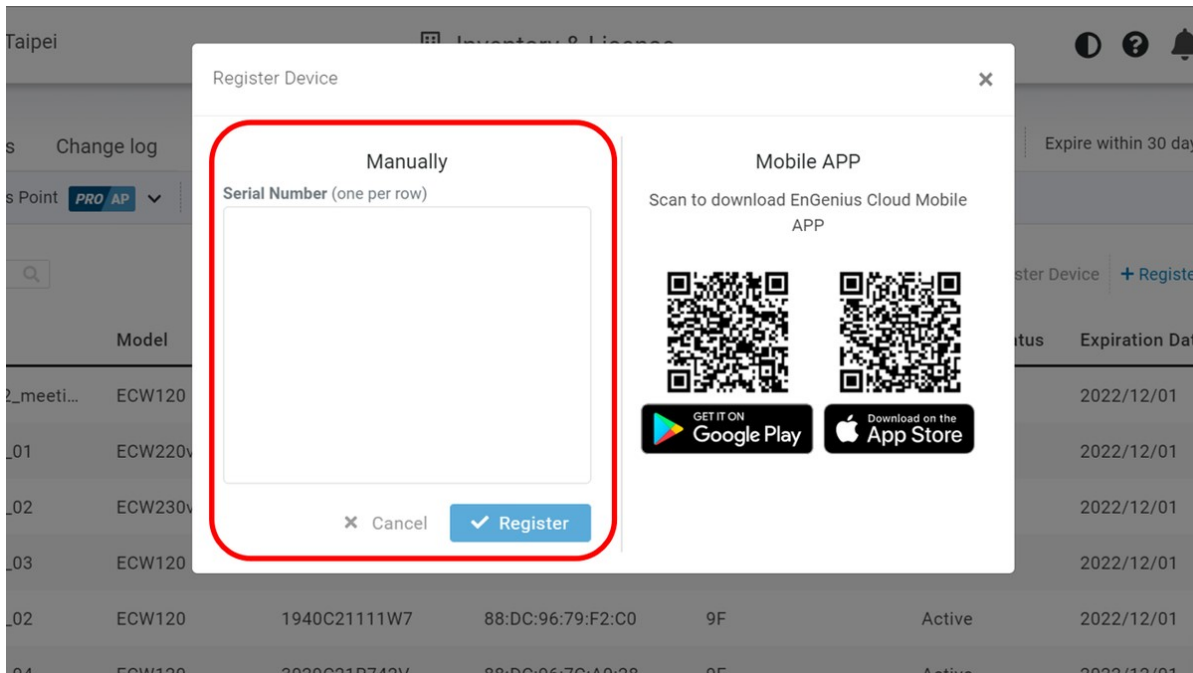

Register Device

4. Select the registered device and click "**Assign to Network**" to add the device to your designated Network.

 **Network:** Management domain shared same configurations within EnGenius Cloud.

## Step2: Power On Device

Connect the **Power Adaptor** to the back of the **VPN Router**, and then plug the **Power Adaptor** into the power outlet.



## Step3: Connect to EnGenius Cloud

## Connecting Ethernet to WAN1

Depending on WAN connection type in your network, WAN1 default connection setting is DHCP; if your WAN connection type is DHCP, after you connect Ethernet cable to WAN1 port, you can skip the next WAN1 connection set-up section through the VPN Router's Local Status Page.

## WAN1 Connection Set-up through Device Local Status Page

If your WAN connection type is Static IP or PPPoE, after you connect Ethernet cable to WAN1 port, you have to access ESG's Local Status Page to configure WAN1 connection. User can connect a PC to P1, P2, or P3 LAN port, and then open browser and type `http://192.168.66.1` or `http://local.engenius` in URL field., where default login username/ password is admin/admin


**Note:** After ESG has been assigned to an Organization/Network, this local credential will be updated by the Local Credential setting in Cloud Configuration (Configure > General Settings > Local Credential).



\*The display model number may be varied according to different models.

## (a) WAN1 Connection by Static IP

Please fill in the IP address config information for your WAN connection (if the uplink switch has tagged VLAN, you need to specify its VLAN ID accordingly).

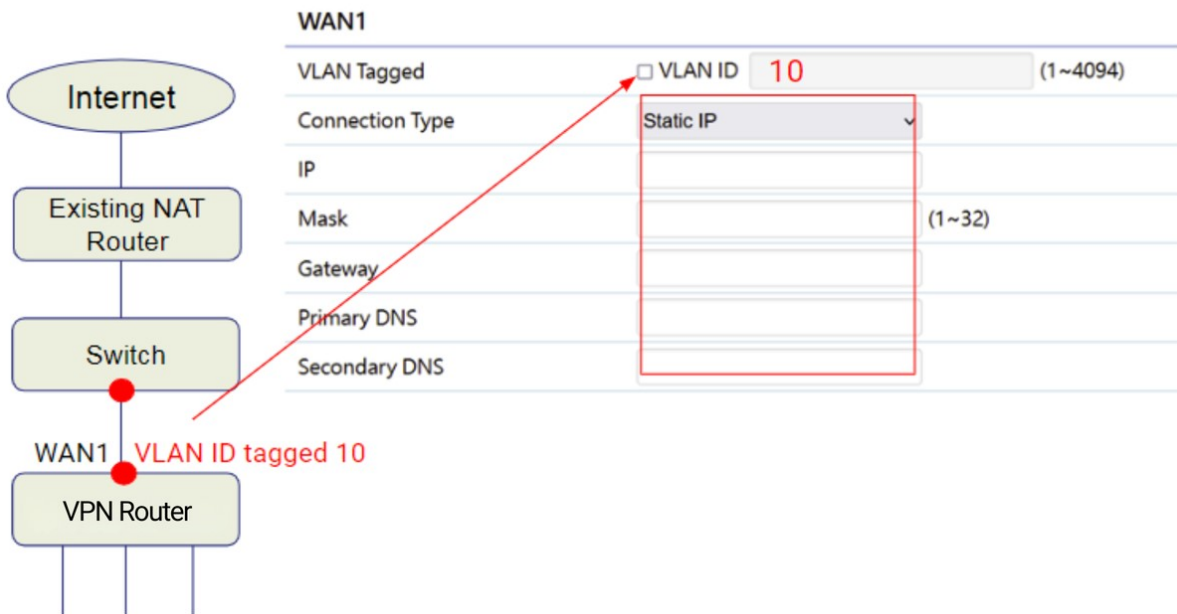

## (b) WAN1 Connection by PPPoE

Please fill in the PPPoE config information for your WAN connection (if the uplink switch has tagged VLAN, you need to specify its VLAN ID accordingly).

### Config WAN1 PPPoE

**WAN1**

VLAN Tagged	<input type="checkbox"/> VLAN ID (1~4094)
Connection Type	PPPoE
Username	
Password	


EnGenius Cloud Connected

Once the device is powered on and ready to connect to the Internet, It will automatically download the default configuration settings from EnGenius Cloud for automated provisioning.

⚠ When the VPN Router is connected to the EnGenius Cloud Platform for the first time and assigned to Network, it will automatically check the latest available firmware. If the firmware upgrade is required, it might take **8~10 minutes** to complete the process.

## Step 4: Manage with the EnGenius Cloud

Log in to the [EnGenius Cloud](#) ↗ [Platform](#) to configure detailed settings. For more information, please refer to [User Manual](#) ↗.

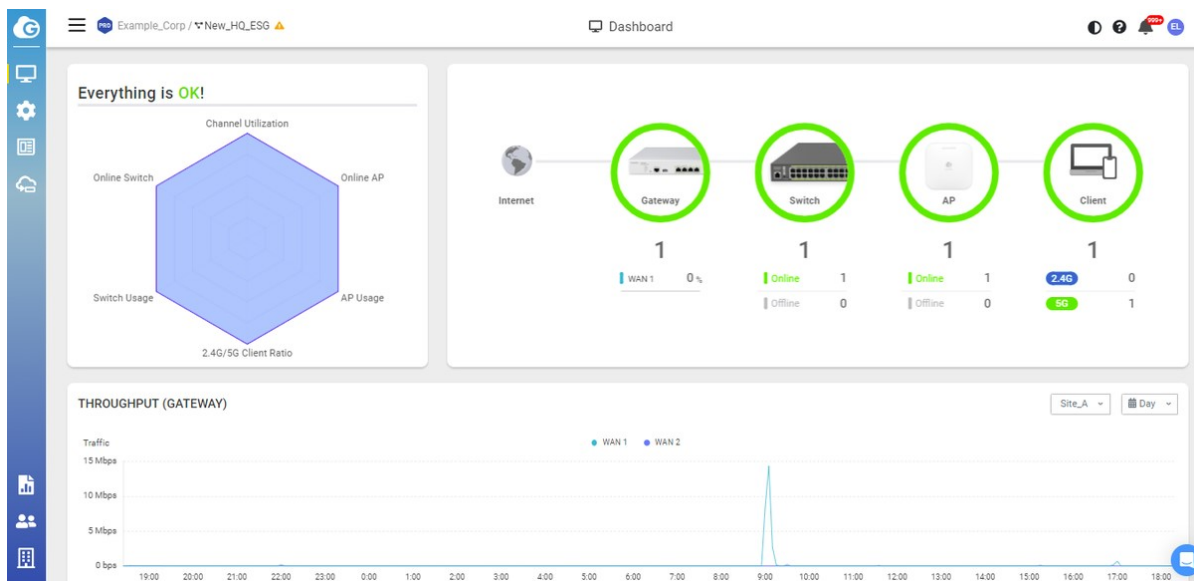

## Troubleshooting

If your VPN Router device cannot be managed by the EnGenius Cloud Platform, there might be a problem with connecting to EnGenius Cloud.

To troubleshoot the connection issue, you may log in to the **VPN Router Local Web** page:

1. Make sure that your computer LAN interface is set to DHCP and connect to the VPN Router's LAN port to get DHCP IP address from the VPN Router. By default, the computer should get the IP address in this segment 192.168.66.x.
2. Under your web browser, enter the URL: <http://192.168.66.1> to access the VPN Router's local status page web interface.
3. You can review the device status after logging into the VPN Router with the default admin account/password (admin/admin).
4. Check the information on the **Device Status** and take action if necessary.

#### Cloud Overview

Cloud Registration	YES
Date of Registration	2022/05/17 18:45:48
Last Update Time	2023/02/15 18:45:03

#### Network Connectivity

##### WAN Network

 Connected to network successfully

- WAN1: 192.168.2.114

##### Internet

 Connected to Internet successfully

##### EnGenius Cloud


 Connected to EnGenius Cloud successfully

 Device registered

## ⚠️ Change WAN IP Assignment Settings

By default, the EnGenius Cloud-managed VPN Router's WAN1 setting is set to DHCP client. If you encounter issues with IP address assignment, please double-check the IP setting, including IP address, subnet mask, VPN Router, DNS, and management VLAN. If the issue still exists, you may change your IP assignment from "*DHCP*" to "*Static IP*" or "*PPPoE*" via the following procedure in VPN Router's Local Status page.

1. Go to the **Local Setting** section.
2. Change Configuration setting to "*Static IP*" or "*PPPoE*".
3. Configure the needed settings for the selected type.
4. Reconnect this VPN Router to the network and try again.

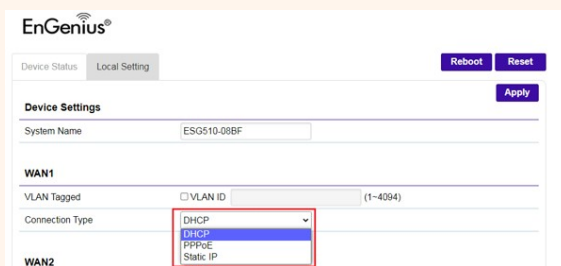

The screenshot shows the EnGenius Local Setting page. The page title is "EnGenius" with a Wi-Fi icon. Below the title, there are tabs for "Device Status" and "Local Setting", and buttons for "Reboot" and "Reset". The "Local Setting" tab is active. Under "Device Settings", there is a "System Name" field with the value "ESG510-08BF" and an "Apply" button. The "WAN1" section is expanded, showing "VLAN Tagged" with a checkbox and "VLAN ID" field (value: 1-4094). The "Connection Type" dropdown menu is open, showing three options: "DHCP", "PPPoE", and "Static IP". The "Static IP" option is highlighted with a red box. The "WAN2" section is partially visible below.