

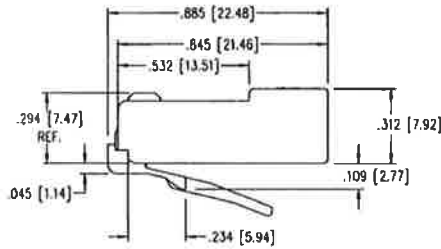

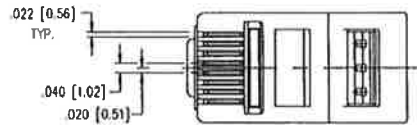


REVISIONS		
Rev	DESCRIPTION	DATE
A	INITIAL RELEASE	

C5EEZUP-xxPAK

- EIGHT CONDUCTOR MODULAR PLUG
- FOR CONDUCTORS WITH AN O.D. RANGE OF .037-.041"
- MAX CABLE OD: 0.240"
- USES .0135 CONTACT
- FOR SOLID OR STRANDED WIRE APPLICATIONS
- RoHS COMPLIANT



SPECIFICATIONS:

CONTACT MATERIAL
CONTACT PLATING

PHOSPHOR BRONZE .0135 THK
50 MICRO INCH SELECTIVE 24 CARAT HARD GOLD IN CONTACT AREA OVER 100 MICRO INCH MINIMUM NICKEL PLATE.

PLUG MATERIAL
PLUG TOLERANCES/DIMS
OPERATION TEMPERATURE
UL RECOGNIZED
FLAME AUTO EXTINGUISH
INSERTION/EXTRACTION
CONTACT RESISTANCE
CURRENT VOLTAGE

POLYCARBONATE
COMPLIES WITH F.C.C. REQUIREMENTS
-40° TO +85° C
FILE# E188111
94-VO
1000 CYCLES
10 MILLIOHMS MAX.
30 VAC/42 VDC AT 1.5 AMPS

MANUFACTURED BY SULLSTAR TECHNOLOGIES, INC. PATENTED: 5,996,224, 6,017,237 and 6,105,229 AND FOREIGN PATENTS. PATENTS INSURED. EZ-RJ45® IS A REGISTERED TRADEMARK OF SULLSTAR TECHNOLOGIES, INC.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±
ANGULAR: MAX ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±



The information contained in this document is the sole property of Black Box Corporation of Pennsylvania. Any reproduction in part or whole without the written permission of Black Box Corp. is prohibited.
© Copyright 2012 Black Box Corporation of Pennsylvania. All Rights Reserved.

INTERPRET GEOMETRIC TOLERANCING PER:
MATERIAL:
FINISH:
DO NOT SCALE DRAWING

NAME	DATE	TITLE:
DRAWN	Drawn By	3/11/2013
ENG APPR	Approved By	3/11/2013
CHECKED	Checked By	3/11/2013
COMMENTS:		
SIZE	DWG. NO.	REV
B	C5EEZUP-xxPAK	A
SCALE: 1:1		SHEET 1 OF 1